PA( )T COOPERATION TREAT(

From the INTERNATIONAL BUREAU

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

To:

Commissioner
US Department of Commerce
United States Patent and Trademark
Office, PCT
2011 South Clark Place Room
CP2/5C24
Arlington, VA 22202
ETATS-UNIS D'AMERIQUE
in its capacity as elected Office

Date of mailing: 01 November 2001 (01.11.01)	
International application No.: PCT/GB00/01675	Applicant's or agent's file reference: P23847A/JMK
International filing date: 02 May 2000 (02.05.00)	Priority date: 01 May 1999 (01.05.99)
Applicant: ADDISON, Paul, Stanley et al	

1. The designated Office is hereby notified of its election made:

[X] in the demand filed with the International preliminary Examining Authority on:

30 November 2000 (30.11.00)

[ ] in a notice effecting later election filed with the International Bureau on:

2. The election [X] was

[ ] was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer:

J. Zahra

Telephone No.: (41-22) 338.83.38

PATENT COOPERATION TREATY

From the INTERNATIONAL BUREAU

PCT

COMMUNICATION OF
INTERNATIONAL APPLICATIONS

(PCT Article 20)

To:

Commissioner
US Department of Commerce
United States Patent and Trademark
Office, PCT
2011 South Clark Place Room
CP2/5C24
Arlington, VA 22202
ETATS-UNIS D'AMERIQUE

in its capacity as designated Office

Date of mailing:
26 September 2001 (26.09.01)

The International Bureau transmits herewith copies of the international applications having the following international application numbers and international publication numbers:

International application no.:	International publication no.:
PCT/GB00/01675	

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer:

J. Zahra

Telephone No.: (41-22) 338.83.38

Copy for the elected Office (EO/US)

P. ENT COOPERATION TREATY

From the INTERNATIONAL BUREAU

PCT

COMMUNICATION IN CASES FOR WHICH NO OTHER FORM IS APPLICABLE

To:
MURGITROYD & COMPANY
373 Scotland Street
Glasgow G5 8QA
ROYAUME-UNI

Date of mailing (*day/month/year*) 26 September 2001 (26.09.01)	
Applicant's or agent's file reference P23847A/JMK	**REPLY DUE** see paragraph 1 below
International application No. PCT/GB00/01675	International filing date (*day/month/year*) 02 May 2000 (02.05.00)
Applicant THE COURT OF NAPIER UNIVERSITY	

1. ☐ REPLY DUE within _____ months/days from the above date of mailing

☐ NO REPLY DUE, however, see below

☒ IMPORTANT COMMUNICATION

☐ INFORMATION ONLY

2. COMMUNICATION:

Due to a clerical error, the international application has not been published promptly after the expiration of 18 months from the priority date, as provided in Article 21(2) of the PCT.

Consequently, the international publication will only take place on 01 November 2001 (01.11.01). Meanwhile, the International Bureau (WO) will communicate the international application to each designated Office, in accordance with Article 20.

A copy of this notification has been sent to the receiving Office (RO/GB), the International Searching Authority (ISA/EP) and all the designated Offices concerned.

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Facsimile No. (41-22) 740.14.35

Authorized officer
Idhir BRITEL

Telephone No. (41-22) 338.83.38

PATENT COOPERATION TREATY

PCT

21 AUG 2001

WIPO PCT

14

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference	FOR FURTHER ACTION	See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)
P23847A/ERA/PPP		
International application No.	International filing date *(day/month/year)*	Priority date *(day/month/year)*
PCT/GB00/01675	02/05/2000	01/05/1999
International Patent Classification (IPC) or national classification and IPC		
G06F17/00		
Applicant		
THE COURT OF NAPIER UNIVERSITY et al.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.

2. This REPORT consists of a total of 12 sheets, including this cover sheet.

   ☐ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

   These annexes consist of a total of sheets.

3. This report contains indications relating to the following items:

   - I ☒ Basis of the report
   - II ☐ Priority
   - III ☒ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
   - IV ☐ Lack of unity of invention
   - V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations suporting such statement
   - VI ☐ Certain documents cited
   - VII ☒ Certain defects in the international application
   - VIII ☒ Certain observations on the international application

Date of submission of the demand	Date of completion of this report
30/11/2000	17.08.2001
Name and mailing address of the international preliminary examining authority:	Authorized officer
European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Barba, M Telephone No. +49 89 2399 2732

Form PCT/IPEA/409 (cover sheet) (January 1994)

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB00/01675

I. Basis of the report

1. With regard to the **elements** of the international application *(Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17))*:
Description, pages:

1-40 as originally filed

Claims, No.:

1-40 as originally filed

Drawings, sheets:

1/14-14/14 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
- ☐ the claims, Nos.:

☐ the drawings, sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)

6. Additional observations, if necessary:

III. Non-establishment of opinion with regard to novelty, inventive step and industrial applicability

1. The questions whether the claimed invention appears to be novel, to involve an inventive step (to be non-obvious), or to be industrially applicable have not been examined in respect of:

☐ the entire international application.

☒ claims Nos. 16-32, 38-40.

because:

☐ the said international application, or the said claims Nos. relate to the following subject matter which does not require an international preliminary examination (*specify*):

☒ the description, claims or drawings (*indicate particular elements below*) or said claims Nos. 16, 38 are so unclear that no meaningful opinion could be formed (*specify*):
see separate sheet

☐ the claims, or said claims Nos. are so inadequately supported by the description that no meaningful opinion could be formed.

☒ no international search report has been established for the said claims Nos. 17-32, 39-40.

2. A meaningful international preliminary examination cannot be carried out due to the failure of the nucleotide and/or amino acid sequence listing to comply with the standard provided for in Annex C of the Administrative Instructions:

☐ the written form has not been furnished or does not comply with the standard.

☐ the computer readable form has not been furnished or does not comply with the standard.

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N) Yes: Claims 3-15, 35-37

	No:	Claims	1, 2, 33-34
Inventive step (IS)	Yes:	Claims	
	No:	Claims	3-15, 35-37
Industrial applicability (IA)	Yes:	Claims	1-15, 33-37
	No:	Claims	-

2. Citations and explanations
see separate sheet

VII. Certain defects in the international application

The following defects in the form or contents of the international application have been noted:
see separate sheet

VIII. Certain observations on the international application

The following observations on the clarity of the claims, description, and drawings or on the question whether the claims are fully supported by the description, are made:
see separate sheet

Reference is made to the following documents:

D1: WO 96 08992 A (SHOSHAN HERBERT Z ;UNIV RAMOT (IL); AKSELROD SOLANGE (IL); KESELBR) 28 March 1996 (1996-03-28)

D3: SAVA H ET AL: 'APPLICATION OF THE MATCHING PURSUIT METHOD FOR STRUCTURAL DECOMPOSITION AND AVERAGING OF PHONOCARDIOGRAPHIC SIGNALS' MEDICAL AND BIOLOGICAL ENGINEERING AND COMPUTING,GB,PETER PEREGRINUS LTD. STEVENAGE, vol. 36, no. 3, 1 May 1998 (1998-05-01), pages 302-308, XP000751653 ISSN: 0140-0118

The following document (D) was not cited in the international search report. A copy of the document is annexed to the Written Opinion and the numbering will be adhered to in the rest of the procedure:

D2: Proceedings of Computers in Cardiology, IEEE, September 23-26 1991, Venice Italy, pages 393-396, D. Morlet et al: "Time-Scale Analysis of High Resolution Signal Averaged Surface ECG Using Wavelet Transformation"

0 With regard to present claims 17 to 32 and 39 to 40, it is noted that no international search report has been established in respect of the above mentioned set of claims.
Consequently this International Preliminary Examining Authorithy, under the provisions of Rule 66.1 (e), does not need to carry out an international preliminary examination in respect to the subject matter of present claims 17 to 32 and 39 to 40.

0.1 This International Preliminary Examination will be therefore limited to the subject matter of present claims 1 to 16 and 33 to 38.

Re Item III

Non-establishment of opinion with regard to novelty, inventive step and industrial applicability

1 When considering the extent of the clarity problems regarding present independent claims 16 and 38 (see Item VIII below) this International Preliminary Examining Authority considers as not possible to give an opinion as to novelty, inventive step and industrial applicability in respect of the above mentioned claim 16 and 38.

Re Item V

Reasoned statement under Rule 66.2(a)(ii) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

2 Insofar as the present text of independent claim 1 can be understood in the light of the description (see Item VIII below), it appears that the subject matter of claim 1 does not fulfill the requirements of novelty as set out in Article 33 (2) PCT, the reasons therefor being the following.

2.1 Document D1, that provisionally is considered as representing the closest prior art, discloses (see from page 9 line 27 to page 12 line 12; from page 13 line 29 to page 15 line 12) a method to analyse an ECG signal by using wavelet decomposition of said ECG signal.
Thus, the subject matter of claim 1 is not novel against the method known from D1 (Article 33 (2) PCT).

3 Dependent claim 2 does not contain any features which, in combination with the features of any claim to which it refers, meet the requirements of the PCT in respect of novelty, because the feature of using discrete wavelet transforms is also disclosed in document D1 (Article 33 (2) PCT).

4 Insofar as the present text of dependent claims 3 to 15 can be understood in the light of the description (see Item VIII below), it also appears that the subject matter of claims 3 to 15 does not involve an inventive step and therefore the requirements of Article 33 (3) PCT are not met, the reasons therefor being the following.

4.1 Document D2 discloses (see page 393 left column lines 1 to 21; from page 393 right column line 16 to page 394 left column line 1; page 394 right column lines 1 to 23; figure 4 and figure 5) a method to analyse an ECG signal using continuous wavelet decomposition including the following features:

i) computing wavelet energy surfaces of said ECG signal and plotting said wavelet energy surfaces against parameters a and b of the wavelets bases;

ii) constructing a contour plot and a surface plot to display said wavelet decomposition of said ECG signal;

iii) constructing a 2D or 3D energy scalogram to display said wavelet decomposition of said ECG signal.

4.1a Moreover, the subject matter of dependent claims 7, 8, 9, 10, 11 and 15 are considered obvious.

5 Therefore, the subject matter of dependent claims 3 to 15 does not include an inventive step contribution in respect of the method known from the combination of the method of D1 and the method of D2 (Article 33 (3) PCT).

6 The below mentioned lack of clarity notwithstanding (see Item VIII below), the subject-matter of claim 33 is not novel in the sense of Article 33 (2) PCT because document D3 discloses (see from page 303 left column line 11 to page 305 right column line 54) a method to decompose a cardiac signal using a matching pursuit algorithm.

7 The below mentioned lack of clarity notwithstanding (see Item VIII below), the subject-matter of independent apparatus claim 34 is not novel in the sense of Article 33 (2) PCT for the same reasons, mutatis mutandis already mentioned in

paragraph 2.1 of this International Preliminary Examination Report.

8 The below mentioned lack of clarity notwithstanding (see Item VIII below), the subject-matter of dependent claims 35 to 37 is not inventive in the sense of Article 33 (3) PCT for the same reasons, mutatis mutandis, already mentioned in paragraph 3 to 4.1b of this International Preliminary Examination Report.

9 With regard to the assessment of the present claims 1 to 15 and 33 to 37 on the question whether they are industrially applicable, the following is stated.
The below mentioned lack of clarity notwithstanding (see Item VIII below), it appears that the subject matter of present claims 1 to 16 and 33 to 37 relates to a method and apparatus to decompose waveforms of a cardiac signal, therefore it fulfills the requirements of industrial applicability as set out in Article 33 (4) PCT.

Re Item VII
Certain defects in the international application

10 At page 6 line 28 of the description the wording "me" should be amended as "method".
At page 9 line 17 of the description the wording "scrologram" should be amended as "scalogram".

10.1 Present independent claims are not in the two-part form in accordance with Rule 6.3(b) PCT, which in the present case would be appropriate, with those features known in combination from the prior art (document D1) being placed in a preamble (Rule 6.3(b)(i) PCT) and with the remaining features being included in a characterising part (Rule 6.3(b)(ii) PCT).
Independent claims should therefore be redrafted accordingly.
In addition, it should be clear from the description which features of the claimed subject-matter are known from documents D1, D2 and D3 (see the PCT Guidelines PCT/GL/3 III, 2.3a).

10.2 Contrary to the requirements of Rule 5.1(a)(ii) PCT, the relevant background art disclosed in the documents D1, D2 and D3 is not mentioned in the description, nor are these documents identified therein.

10.3 The features of the claims are not provided with reference signs placed in parentheses (Rule 6.2(b) PCT).

10.4 Furthermore, at page 40, last paragraph, the description contains general statements that the extent of protection may be expanded in some vague and not precisely defined way. Such general statements shall be deleted as contrary to Article 6 PCT, cf. also PCT Preliminary Examination Guidelines, C-III, 4.3a.

Re Item VIII

Certain observations on the international application

11 Present independent claim 1 is not clear and as such it does not fulfill the requirements of Article 6 PCT for the following reasons.

11.1 The wording of present claim 1 is too broad and vague and it does not enable the person skilled in the art to carry out the invention without any further inventive effort, which is against Article 6 PCT.
It is the opinion of this Authority that the person skilled in the art would be unable, on the basis of the information given in the application as filed, to extend the particular teaching of the description to the whole of the fields claimed by using routine methods of experimentation or analysis. Therefore, the wording of present claim 1 should be amended in order to properly limit the extent of the subject matter claimed in accordance with the subject matter as disclosed in the application as a whole.

12 Dependent claim 2 is also vague and unclear and therefore it does not meet the requirements of Article 6 PCT, the reasons therefor being the following.

12.1 The wording "comprising the step of employing discretized wavelet transform analysis to process the cardiac waveform" used in claim 2 is vague and unclear and leaves the reader in doubt as to the meaning of the technical features to which it refers, thereby rendering the definition of the subject matter of said claim unclear (Article 6 PCT).

13 Dependent claim 3 is also vague and unclear and therefore it does not meet the requirements of Article 6 PCT, for the same reason already mentioned in paragraph 12.1 of this International Preliminary Examination Report and for the following additional reason.

13.1 The wording "discretized continuous" used in claim 3 does not have a clear technical meaning and as such it leaves the reader in doubt as to the meaning of the technical features to which it refers, thereby rendering the definition of the subject matter of said claim unclear (Article 6 PCT).
This is also so because a wavelet basis either is discrete or is continuous; moreover it appears from the description that the method of the application is specified in base of continuous Morlet wavelet basis functions.

14 Dependent claim 7 is also vague and unclear and therefore it does not meet the requirements of Article 6 PCT, the reasons therefor are the following.

14.1 The wording "derive the cardiac signal" used in claim 7 is unclear and as such it leaves the reader in doubt as to the meaning of the technical features to which it refers, thereby rendering the definition of the subject matter of said claim unclear for the following reasons.
The wording of present claims 1 to 6 does not specify whether the named "cardiac signal" is an analogical signal or it is a digitized signal, while from the wording of dependent claim 7 it appears that what the applicant meant was a digitized cardiac signal. This fact creates in the reader a state of uncertainty as to the extent of the subject matter claimed, which is against the provisions of Article 6 Pct.

15 Dependent claims 10 and 11 are also vague and unclear and as such they do not fulfill the provisions of clarity of Article 6 PCT for the following reasons.

15.1 The wordings "coherent structures" and "for clinical use" used in claim 10 and 11 respectively do not have a clear technical meaning and as such they leave the reader in doubt as to the meaning of the technical features to which it refers, thereby rendering the definition of the subject matter of said claim unclear (Article 6 PCT).

16 Claim 15 does not meet the requirements of Article 6 PCT in that the matter claimed is not clearly defined. The claim attempts to define the subject matter in terms of the result to be achieved which merely amounts to a statement of the underlying problem. The technical features necessary for achieving this result should be added.

17 Independent claim 16 does not meet the requirements of Article 6 PCT in that the matter claimed is not clearly defined. The overall wording of claim 16 does not provide the required intelligibility in order to be understood by the average skilled person. It is necessary to redraft the claim using a more understandable manner, in order to meet the requirements of Article 6 PCT (clarity in the sense of intelligibility).

18 Present independent claim 33 is not clear and as such it does not fulfill the requirements of Article 6 PCT for the same reasons already mentioned in paragraph 11.1 of this International Preliminary Examination Report.

19 Independent claim 34 and dependent claims 35 to 37 are also vague and unclear and as such they do not fulfill the requirements of Article 6 PCT for the following reasons.

19.1 Claims 34 to 37 do not meet the requirements of Article 6 PCT in that the matter

claimed is not clearly defined. The functional statements included in the wording of present claims 34 to 37 do not enable the skilled person to determine which technical features are necessary to perform the stated functions.

20 Independent claim 38 does not meet the requirements of Article 6 PCT in that the matter claimed is not clearly defined for the same reasons as above mentioned in paragraph 17 of this International Preliminary Examination Report.

Record Copy

PCT

REQUEST

The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty.

For receiving Office use only

PCT/GB 0 0 / 0 1 6 7 5

International Application No.

02-05-00

International Filing Date 0 2 MAY 2000

United Kingdom Patent Office
PCT International Application

Name of receiving Office and "PCT International Application"

Applicant's or agent's file reference
(if desired) (12 characters maximum) P23847A/JMK

Box No. I TITLE OF INVENTION

"Method of Analysis of Medical Signals"

Box No. II APPLICANT

Name and address: *(Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)*

The Court of Napier University
Merchiston Tower
Colinton Road
EDINBURGH
EH10 5DT
United Kingdom

☐ This person is also inventor.

Telephone No.

Facsimile No.

Teleprinter No.

State *(that is, country)* of nationality: United Kingdom

State *(that is, country)* of residence: United Kingdom

This person is applicant for the purposes of: ☐ all designated States ☒ all designated States except the United States of America ☐ the United States of America only ☐ the States indicated in the Supplemental Box

Box No. III FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S)

Name and address: *(Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)*

ADDISON, Paul Stanley
58 Buckstone Crook
EDINBURGH
EH10 6UR
United Kingdom

This person is:

☐ applicant only

☒ applicant and inventor

☐ inventor only *(If this check-box is marked, do not fill in below.)*

State *(that is, country)* of nationality: United Kingdom

State *(that is, country)* of residence: United Kingdom

This person is applicant for the purposes of: ☐ all designated States ☐ all designated States except the United States of America ☒ the United States of America only ☐ the States indicated in the Supplemental Box

☒ Further applicants and/or (further) inventors are indicated on a continuation sheet.

Box No. IV AGENT OR COMMON REPRESENTATIVE; OR ADDRESS FOR CORRESPONDENCE

The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent International Authorities as: ☒ agent ☐ common representative

Name and address: *(Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)*

Murgitroyd & Company
373 Scotland Street
Glasgow
G5 8QA
United Kingdom

Telephone No.
0141 307 8400

Facsimile No.
0141 307 8401

Teleprinter No.

☐ **Address for correspondence:** Mark this check-box where no agent or common representative is/has been appointed and the space above is used instead to indicate a special address to which correspondence should be sent.

Sheet No. 2

Continuation of Box No. III FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S)

If none of the following sub-boxes is used, this sheet should not be included in the request.

Name and address: *(Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)*

WATSON, James Nicholas
34 Fowler Terrace
EDINBURGH
EH11 1DA
United Kingdom

This person is:
- ☐ applicant only
- ☒ applicant and inventor
- ☐ inventor only *(If this check-box is marked, do not fill in below.)*

State *(that is, country)* of nationality: United Kingdom

State *(that is, country)* of residence: United Kingdom

This person is applicant for the purposes of: ☐ all designated States ☐ all designated States except the United States of America ☒ the United States of America only ☐ the States indicated in the Supplemental Box

Name and address: *(Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)*

This person is:
- ☐ applicant only
- ☐ applicant and inventor
- ☐ inventor only *(If this check-box is marked, do not fill in below.)*

State *(that is, country)* of nationality:

State *(that is, country)* of residence:

This person is applicant for the purposes of: ☐ all designated States ☐ all designated States except the United States of America ☐ the United States of America only ☐ the States indicated in the Supplemental Box

Name and address: *(Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)*

This person is:
- ☐ applicant only
- ☐ applicant and inventor
- ☐ inventor only *(If this check-box is marked, do not fill in below.)*

State *(that is, country)* of nationality:

State *(that is, country)* of residence:

This person is applicant for the purposes of: ☐ all designated States ☐ all designated States except the United States of America ☐ the United States of America only ☐ the States indicated in the Supplemental Box

Name and address: *(Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)*

This person is:
- ☐ applicant only
- ☐ applicant and inventor
- ☐ inventor only *(If this check-box is marked, do not fill in below.)*

State *(that is, country)* of nationality:

State *(that is, country)* of residence:

This person is applicant for the purposes of: ☐ all designated States ☐ all designated States except the United States of America ☐ the United States of America only ☐ the States indicated in the Supplemental Box

☐ Further applicants and/or (further) inventors are indicated on another continuation sheet.

Box No.V DESIGNATION OF STATES

The following designations are hereby made under Rule 4.9(a) *(mark the applicable check-boxes; at least one must be marked)*:

Regional Patent

- ☒ **AP** **ARIPO Patent:** **GH** Ghana, **GM** Gambia, **KE** Kenya, **LS** Lesotho, **MW** Malawi, **SD** Sudan, **SL** Sierra Leone, **SZ** Swaziland, **TZ** United Republic of Tanzania, **UG** Uganda, **ZW** Zimbabwe, and any other State which is a Contracting State of the Harare Protocol and of the PCT
- ☒ **EA** **Eurasian Patent:** **AM** Armenia, **AZ** Azerbaijan, **BY** Belarus, **KG** Kyrgyzstan, **KZ** Kazakhstan, **MD** Republic of Moldova, **RU** Russian Federation, **TJ** Tajikistan, **TM** Turkmenistan, and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT
- ☒ **EP** **European Patent:** **AT** Austria, **BE** Belgium, **CH and LI** Switzerland and Liechtenstein, **CY** Cyprus, **DE** Germany, **DK** Denmark, **ES** Spain, **FI** Finland, **FR** France, **GB** United Kingdom, **GR** Greece, **IE** Ireland, **IT** Italy, **LU** Luxembourg, **MC** Monaco, **NL** Netherlands, **PT** Portugal, **SE** Sweden, and any other State which is a Contracting State of the European Patent Convention and of the PCT
- ☒ **OA** **OAPI Patent:** **BF** Burkina Faso, **BJ** Benin, **CF** Central African Republic, **CG** Congo, **CI** Côte d'Ivoire, **CM** Cameroon, **GA** Gabon, **GN** Guinea, **GW** Guinea-Bissau, **ML** Mali, **MR** Mauritania, **NE** Niger, **SN** Senegal, **TD** Chad, **TG** Togo, and any other State which is a member State of OAPI and a Contracting State of the PCT *(if other kind of protection or treatment desired, specify on dotted line)* .....

National Patent *(if other kind of protection or treatment desired, specify on dotted line)*:

- ☒ **AE** United Arab Emirates
- ☒ **AL** Albania
- ☒ **AM** Armenia
- ☒ **AT** Austria
- ☒ **AU** Australia
- ☒ **AZ** Azerbaijan
- ☒ **BA** Bosnia and Herzegovina
- ☒ **BB** Barbados
- ☒ **BG** Bulgaria
- ☒ **BR** Brazil
- ☒ **BY** Belarus
- ☒ **CA** Canada
- ☒ **CH and LI** Switzerland and Liechtenstein
- ☒ **CN** China
- ☒ **CR** Costa Rica
- ☒ **CU** Cuba
- ☒ **CZ** Czech Republic
- ☒ **DE** Germany
- ☒ **DK** Denmark
- ☒ **DM** Dominica
- ☒ **EE** Estonia
- ☒ **ES** Spain
- ☒ **FI** Finland
- ☒ **GB** United Kingdom
- ☒ **GD** Grenada
- ☒ **GE** Georgia
- ☒ **GH** Ghana
- ☒ **GM** Gambia
- ☒ **HR** Croatia
- ☒ **HU** Hungary
- ☒ **ID** Indonesia
- ☒ **IL** Israel
- ☒ **IN** India
- ☒ **IS** Iceland
- ☒ **JP** Japan
- ☒ **KE** Kenya
- ☒ **KG** Kyrgyzstan
- ☒ **KP** Democratic People's Republic of Korea
- ☒ **KR** Republic of Korea
- ☒ **KZ** Kazakhstan
- ☒ **LC** Saint Lucia
- ☒ **LK** Sri Lanka
- ☒ **LR** Liberia
- ☒ **LS** Lesotho
- ☒ **LT** Lithuania
- ☒ **LU** Luxembourg
- ☒ **LV** Latvia
- ☒ **MA** Morocco
- ☒ **MD** Republic of Moldova
- ☒ **MG** Madagascar
- ☒ **MK** The former Yugoslav Republic of Macedonia
- ☒ **MN** Mongolia
- ☒ **MW** Malawi
- ☒ **MX** Mexico
- ☒ **NO** Norway
- ☒ **NZ** New Zealand
- ☒ **PL** Poland
- ☒ **PT** Portugal
- ☒ **RO** Romania
- ☒ **RU** Russian Federation
- ☒ **SD** Sudan
- ☒ **SE** Sweden
- ☒ **SG** Singapore
- ☒ **SI** Slovenia
- ☒ **SK** Slovakia
- ☒ **SL** Sierra Leone
- ☒ **TJ** Tajikistan
- ☒ **TM** Turkmenistan
- ☒ **TR** Turkey
- ☒ **TT** Trinidad and Tobago
- ☒ **TZ** United Republic of Tanzania
- ☒ **UA** Ukraine
- ☒ **UG** Uganda
- ☒ **US** United States of America
- ☒ **UZ** Uzbekistan
- ☒ **VN** Viet Nam
- ☒ **YU** Yugoslavia
- ☒ **ZA** South Africa
- ☒ **ZW** Zimbabwe

Check-boxes reserved for designating States which have become party to the PCT after issuance of this sheet:

- ☐ .....
- ☐ .....

Precautionary Designation Statement: In addition to the designations made above, the applicant also makes under Rule 4.9(b) all other designations which would be permitted under the PCT except any designation(s) indicated in the Supplemental Box as being excluded from the scope of this statement. The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by the applicant at the expiration of that time limit. *(Confirmation (including fees) must reach the receiving Office within the 15-month time limit.)*

Supplemental Box *If the Supplemental Box is not used, this sheet should not be included in the request.*

1. If, in any of the Boxes, the space is insufficient to furnish all the information: in such case, write "Continuation of Box No. ..." [indicate the number of the Box] and furnish the information in the same manner as required according to the captions of the Box in which the space was insufficient, in particular:

(i) if more than two persons are involved as applicants and/or inventors and no "continuation sheet" is available: in such case, write "Continuation of Box No. III" and indicate for each additional person the same type of information as required in Box No. III. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below;

(ii) if, in Box No. II or in any of the sub-boxes of Box No. III, the indication "the States indicated in the Supplemental Box" is checked: in such case, write "Continuation of Box No. II" or "Continuation of Box No. III" or "Continuation of Boxes No. II and No. III" (as the case may be), indicate the name of the applicant(s) involved and, next to (each) such name, the State(s) (and/or, where applicable, ARIPO, Eurasian, European or OAPI patent) for the purposes of which the named person is applicant;

(iii) if, in Box No. II or in any of the sub-boxes of Box No. III, the inventor or the inventor/applicant is not inventor for the purposes of all designated States or for the purposes of the United States of America: in such case, write "Continuation of Box No. II" or "Continuation of Box No. III" or "Continuation of Boxes No. II and No. III" (as the case may be), indicate the name of the inventor(s) and, next to (each) such name, the State(s) (and/or, where applicable, ARIPO, Eurasian, European or OAPI patent) for the purposes of which the named person is inventor;

A ADDED R26(e,3

(iv) if, in addition to the agent(s) indicated in Box No. IV, there are further agents: in such case, write "Continuation of Box No. IV" and indicate for each further agent the same type of information as required in Box No. IV;

(v) if, in Box No. V, the name of any State (or OAPI) is accompanied by the indication "patent of addition," or "certificate of addition," or if, in Box No. V, the name of the United States of America is accompanied by an indication "continuation" or "continuation-in-part": in such case, write "Continuation of Box No. V" and the name of each State involved (or OAPI), and after the name of each such State (or OAPI), the number of the parent title or parent application and the date of grant of the parent title or filing of the parent application;

AA DELETED R26(e)

(vi) if, in Box No. VI, there are more than three earlier applications whose priority is claimed: in such case, write "Continuation of Box No. VI" and indicate for each additional earlier application the same type of information as required in Box No. VI;

(vii) if, in Box No. VI, the earlier application is an ARIPO application: in such case, write "Continuation of Box No. VI", specify the number of the item corresponding to that earlier application and indicate at least one country party to the Paris Convention for the Protection of Industrial Property or one Member of the World Trade Organization for which that earlier application was filed.

2. If, with regard to the precautionary designation statement contained in Box No. V, the applicant wishes to exclude any State(s) from the scope of that statement: in such case, write "Designation(s) excluded from precautionary designation statement" and indicate the name or two-letter code of each State so excluded.

3. If the applicant claims, in respect of any designated Office, the benefits of provisions of the national law concerning non-prejudicial disclosures or exceptions to lack of novelty: in such case, write "Statement concerning non-prejudicial disclosures or exceptions to lack of novelty" and furnish that statement below.

Continuation of Box No VI

1 October 1999	9923110.2	United Kingdom
A 01-10-99		
17 February 2000	0003711.9	United Kingdom
A 17-02-00		

Box No. VI PRIORITY CLAIM ☐ Further priority claims are indicated in the Supplemental Box.

Filing date of earlier application (day/month/year)	Number of earlier application	Where earlier application is: national application: country	regional application:* regional Office	international application: receiving Office
item (1) 1 May 1999 A 01-05-99	9910019.0	United Kingdom		
item (2) 15 July 1999 A 15-07-99	9916499.8	United Kingdom		
item (3) 20 August 1999 A 20-08-99	9919677.6	United Kingdom		

☒ The receiving Office is requested to prepare and transmit to the International Bureau a certified copy of the earlier application(s) *(only if the earlier application was filed with the Office which for the purposes of the present international application is the receiving Office)* identified above as item(s): (1), (2), (3)

** Where the earlier application is an ARIPO application, it is mandatory to indicate in the Supplemental Box at least one country party to the Paris Convention for the Protection of Industrial Property for which that earlier application was filed (Rule 4.10(b)(ii)). See Supplemental Box.*

A ADDED RO/EP

Box No. VII INTERNATIONAL SEARCHING AUTHORITY

Choice of International Searching Authority (ISA) *(if two or more International Searching Authorities are competent to carry out the international search, indicate the Authority chosen; the two-letter code may be used)* : ISA /

Request to use results of earlier search; reference to that search *(if an earlier search has been carried out by or requested from the International Searching Authority)*: Date *(day/month/year)* Number Country *(or regional Office)*

AA DELETED RO/EP

Box No. VIII CHECK LIST; LANGUAGE OF FILING

This international application contains the following **number of sheets**:

request	: 5
description (excluding sequence listing part)	: 40
claims	: 6
abstract	: 1
drawings	: 14
sequence listing part of description	:
Total number of sheets	: 66

This international application is **accompanied** by the item(s) marked below:

1. ☐ fee calculation sheet
2. ☐ separate signed power of attorney
3. ☐ copy of general power of attorney; reference number, if any:
4. ☐ statement explaining lack of signature
5. ☐ priority document(s) identified in Box No. VI as item(s):
6. ☐ translation of international application into (language):
7. ☐ separate indications concerning deposited microorganism or other biological material
8. ☐ nucleotide and/or amino acid sequence listing in computer readable form
9. ☐ other *(specify)*:

Figure of the drawings which should accompany the abstract: 9

Language of filing of the international application: English

Box No. IX SIGNATURE OF APPLICANT OR AGENT

Next to each signature, indicate the name of the person signing and the capacity in which the person signs (if such capacity is not obvious from reading the request).

Murgitroyd & Company

Murgitroyd & Company

For receiving Office use only

1. Date of actual receipt of the purported international application: 02 MAY 2000 /02-05-00
2. Drawings: ☒ received: ☐ not received:
3. Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application:
4. Date of timely receipt of the required corrections under PCT Article 11(2):
5. International Searching Authority (if two or more are competent): ISA /
6. ☒ Transmittal of search copy delayed until search fee is paid.

For International Bureau use only

Date of receipt of the record copy by the International Bureau: 26 MAY 2000 (26.05.00)

"Method of Analysis of Medical Signals"

This invention relates to a method of analysis of medical signals, and in particular to a method of decomposition of cardiac signals using wavelet transform analysis. Specifically the invention relates to an improved method of resuscitation of patients in cardiac arrest.

In the UK, coronary heart disease is the second greatest contributor to deaths of people under 75. The social and economic consequences of these death rates

are enormous. The current survivability rates of patients after sudden cardiac failure are around 1:10.

Ventricular tachyarrhythmias, specifically ventricular fibrillation (VF), are the primary arrhythmic events in cases of sudden cardiac death. Administration of prompt therapy to a patient presenting with such symptoms can however lead to their successful resuscitation. Until recently, the only indicators of likelihood of survival of a patient to hospital discharge were traditional variables such as emergency service response time or bystander cardio-pulmonary resuscitation (CPR).

In most cardiac complaints, analysis of a surface electrocardiogram (EKG) of the presenting patient is a rich source of information. However, until recently, a surface EKG recorded during VF and any subsequent medical intervention to defibrillate, was thought merely to present unstructured electrical activity, and not to provide useful information.

The first attempts to derive prognostic information from EKGs of the heart in VF focussed on the importance of the amplitude of the waveform defined using peak-to-trough differences in the EKG voltage, measured as either the greatest deflection occurring in a predefined time slot, or as the average peak-to-trough voltage measured over a given time interval. It has been shown that the VF amplitude is inversely related to time elapsed since collapse, is a crude predictor of defibrillation outcome, and is a better indicator of

survival to hospital discharge than the traditional variables described above.

However, recording the VF amplitude accurately is significantly problematical. The EKG voltage amplitude measured during VF is dependent on the direction of the main fibrillation vector and is influenced by a variety of factors including patient chest shape; electrode size; electrode location; and skin/electrode interface resistance. This number of variables makes this amplitude measure both unreliable and inaccurate. That is, although the amplitude of the waveform of an EKG recorded during VF is now recognised to be a crude predictor of the likely outcome of resuscitation of a patient in VF, it is not a reproducible marker of sensitivity to defibrillation, and lacks clinical usefulness.

In a further development, it is also known to use Fast-Fourier based transforms to generate a frequency spectrum of an EKG in VF to analyse the signal. The median frequency (MF) divides the area under the spectrum into two equal parts. Since this plot is derived from information in both the voltage and time domains, external variables such as lead placement have less effect on the results than the method of observing the amplitude. However, CPR produces artefacts in the recorded EKG signal and, since pausing CPR merely to obtain an EKG signal free of artefacts is likely to compromise resuscitation, these artefacts are necessarily included in this frequency measure, and detract from its usefulness.

Thus the results of such signal analysis show some correlation with the likely outcome of resuscitation, but again lack sufficient sensitivity and specificity for clinical use. That is, this form of analysis has the disadvantage that, since the Fourier spectrum contains only globally averaged information, specific features in the signal are lost.

A method of accurate analysis of a surface EKG waveform recorded during VF would therefore be useful in understanding the pathophysiological processes in sudden cardiac death, and thus to produce a model for use:

in predicting the efficacy of therapy in individual cases; and

in determining the selection of the preferred course of primary, and alternative or adjunct therapies thus providing a means for individually tailored therapy for the specific patient needs

to improve the success rate of resuscitation of patients presenting in VF.

Atrial fibrillation (AF) is a common cardiac arrhythmia in older people. Atrial fibrillation can be stopped by giving an electric shock to the patient under general anaesthetic (cardioversion). However, many patient return to an AF rhythm soon after treatment. The technology detailed here may also provide a tool to

facilitate the clinical evaluation of AF exhibited in the electrocardiogram (EKG) so reducing the risk associated with general anaesthetic in patients where the applied therapy is likely to prove ineffective.

According to the present invention there is provided a method of decomposition of waveforms in a cardiac signal using wavelet transform analysis.

The method of the invention is non-invasive, accurate, and capable of delivering real-time information.

Preferably said method employs discretized wavelet transform analysis to process the EKG.

Preferably said method employs discretized continuous wavelet transform analysis to process the EKG.

Preferably said method comprises the steps of deriving the wavelet energy surfaces of an EKG signal; and plotting said wavelet energy surfaces against a location parameter b, and a scale parameter. The scale parameter may be dilation a or band pass frequency f_{bpc}.

The method initially comprises the steps of connecting electrodes to the presenting patient; and sampling the analogue input signal to derive the cardiac signal.

Typically said method comprises the step of visually displaying the cardiac signal.

Said method may display the distribution of energies within the cardiac signal. Said method may display coherent structures within the cardiac signal.

Said display may be by means of a contour plot. Said display may be by means of a surface plot. Preferably said method provides means to visualise the signal in real-time for clinical use.

Preferably said method is applicable in the analysis of an EKG in ventricular fibrillation.

Said method may be applicable in the analysis of an EKG in ventricular fibrillation after the commencement of cardio-pulmonary resuscitation (CPR).

The method may include the step of disassociating the component features of the temporal trace of a recorded EKG. Additionally or alternatively said method may include the step of temporal filtering of an EKG signal of a heart which is subject to CPR to disassociate the CPR signal from the heart signal.

Typically said method provides measurable characteristics for the estimation of the health of a heart in VF. Said method may provide measurable characteristics for the estimation of the health of a heart in AF. Said me may provide Typically said method provides measurable characteristics for the estimation of the health of a heart.

The method may provide measurable characteristics for the estimation of the time elapsed since the onset of a cardiac incident.

Typically said method provides measurable characteristics for the estimation of the health of a heart after commencement in CPR.

Said method may provide a prediction for the outcome of a given therapeutic intervention and so aid the clinical decision making process.

Said method may provide a basis for individual, patient specific, protocols for therapeutic intervention.

The method may provide a guide to the optimal timing of defibrillation of a heart in VF.

Said method may include the step of constructing a damage index for reference purposes. Construction of said index might involve the development of a network classifier from a library of recorded data. Said network classifier may comprise a neural network. Said network classifier may comprise a wavelet network classifier.

Application of the method of the invention represents a significant advance in coronary care by providing a reliable predictor of the outcome of shocking a patient in VF. In addition, the development of an algorithm using the method of the invention gives the ability to predict shock outcome and to facilitate individual

patient therapy. The ability to provide patient specific therapeutic intervention is a priority in the advancement of currently applied medical protocols.

That is, as discussed above, in certain instances, after prolonged cardiac arrest preceding defibrillation pharmacological measures or CPR can increase the chance of successful resuscitation. Thus, employing the method to predict the outcome of shocking avoids futile defibrillation attempts which can even harm the heart, and can indicate the need for intervention, and influence the selection of the preferred type of intervention, to optimise the metabolic state of the heart prior to counter-shock.

The predictor algorithm developed using the method is being tested using a new generation of defibrillation devices that have the flexibility to allow easy prototyping of the new defibrillation algorithms.

According to a further aspect of the present invention there is provided a method of decomposition of waveforms in a cardiac signal using matching pursuit algorithms.

According to a further aspect of the present invention there is provided an apparatus for decomposition of waveforms in a cardiac signal, said apparatus comprising wavelet transform analysis means.

Said apparatus may include means to display the distribution of energies within a waveform.

Said apparatus may include a monitor adapted to display decomposed waveforms. Said apparatus may be adapted for inclusion in an EKG apparatus.

According to a further aspect of the present invention there is provided defibrillation means adapted to operate in response to a signal generated by comparison of an EKG trace with decomposed waveform.

That is, the invention preferably provides a method of wavelet analysis of cardiac signals which provides structural information about the heart - whether the heart is healthy or not - and has significant advantages over fast Fourier transforms.

The invention may provide a display device in the form of a scrologram that provides real-time visualisation of a wavelet scalogram, showing the distribution of energies and coherent structures within the signal for use as guidance by a clinician.

The invention may further provide a data analysis tool, which assists in shock timing (atrial pulsing). That is, the derived data may indicate the optimum time to administer shock to the heart. The invention may provide a damage index, preferably in the form of an artificial neural network.

Preferably the invention provides dissociation of the component features of a temporal trace of a cardiac signal, which may for example be CPR, AF, or cardio-phonographic signals.

Embodiments of the invention will now be described by way of example only and with reference to the accompanying drawings in which:

Figure 1a is a Mexican hat wavelet;

Figure 1b is the real part of a complex Morlet wavelet;

Figure 2a is a schematic plot showing the dilation of a continuous wavelet;

Figure 2b is a schematic plot showing the translation of a continuous wavelet;

Figures 3a to Figure 3e are the plots of the 'investigation' of a sinusoidal signal by Mexican hat wavelets of various sizes, showing the effect of translation of the wavelet along the signal (change in b), and dilation of the wavelet (change in a);

Figure 4a is the plot of five cycles of a sine wave of period P;

Figure 4b is the contour plot of $T(a,b)$ against a and b for the sine wave of Figure 4a;

Figure 4c is the isometric surface plot of $T(a,b)$ against a and b for the sine wave of Figure 4a;

Figure 5a is the plot of a combination of two sine waves of period P1, and P2, where P1 = 5P2;

Figure 5b is the contour plot of *T(a,b)* against *a* and *b* for the sine wave of Figure 5a;

Figure 5c is the isometric surface plot of *T(a,b)* against *a* and *b* for the sine wave of Figure 5a;

Figure 6a is an EKG trace of a pig heart in sinus rhythm;

Figure 6b is a 2D energy scalogram associated with the EKG trace of Figure 6a;

Figure 6c is a 3D energy scalogram associated with the EKG trace of Figure 6a;

Figures 6d, 6e, 6f and 6g are the energy surface plots from four segments of an EKG signal subsequent to the onset of VF, showing the three dominant ridges A, B, and C appearing in the transform surface, and showing in Figure 6g the onset of CPR after five minutes, associated with a gradual increase in passband frequency of the ridges A,B, and C;

Figure 7a is an energy scalogram for a pig heart for the first seven minutes of ventricular fibrillation, indicating the initiation of CPR after five minutes;

Figure 7b is a schematic diagram of the salient features of the scalogram of Figure 7a;

Figure 7c is the smoothed plot of energy at the 8Hz level in the scalogram of Figure 7a against time;

Figure 8a is a typical segment of an EKG trace of a pig heart in VF;

Figures 8b, 8c, and 8d are the energy scalograms associated with the trace of Figure 8a;

Figure 9 is a screen shot of a real time viewer which shows the collected EKG data with its associated wavelet energy display in the form of its energy scalogram, where windows scroll to the right;

Figure 10a is a 7 second trace of human ECG showing a shock event;

Figure 10b is a scalogram corresponding to the trace of Figure 10a;

Figure 11a shows the proportion of energy in scalograms for 120 results (60 ROSC, and 60 asystole) at 1.9 Hz after shocking;

Figure 11b shows the proportion of energy in scalograms for 120 results (60 ROSC, and 60 asystole) at 9.3 Hz after shocking;

Figure 12a is a schematic representation of overlapping signal segments used in a neural network test study;

Figure 12b shows the weights attributed by the Kohonen network to the 30 frequency levels used in the scalogram;

Figure 13a is an aorta pressure trace;

Figure 13b shows the EKG for the same time period as the trace of Figure 13a; and

Figure 13c is the scalogram associated with the trace of Figure 13a derived from the Morlet wavelet;

Figure 13d is a detail of the phase part of scalogram Figure 13c;

Figure 13e is the scalogram associated with the trace of Figure 13a derived from the Mexican hat wavelet; and

Figure 13f demonstrates the correlation of aorta pressure pulse position with lines of zero phase;

Figures 14a is the plot of an EKG trace. Figure 14b is its associated phase at around 1.5Hz. Figure 14c is its energy scalogram. The correlation of zero phase at this lower frequency

and high frequency (low dilation) peaks is thus illustrated.

Figure 15a shows a 2 second segment of EKG taken from a patient with atrial fibrillation (AF). Figure 15b shows the wavelet scalogram plot associated with this EKG. Figure 15c shows the corresponding modulus maxima of the scalogram of Figure 15b.

Figure 15d contains a 7 second segment of EKG exhibiting AF. Figure 15e is a trace of EKG temporal components with small amplitude. Figure 15f shows the larger magnitude components i.e. the QRS and T waves.

Figure 15g is a plot of a two second 'blow up' of part of the signal of Figure 15d; Figure 15h is a plot of a two second 'blow up' of part of the signal of Figure 15e; and Figure 15i is a plot of a two second 'blow up' of part of the signal of Figure 15f.

Referring to the Figures, the present method employs the use of a wavelet transform to analyse a cardiac signal.

The method involves the decomposition of the signal. This decomposition is accomplished by utilising wavelet transforms to decompose the signal in wavelet space.

A key distinction between the Fourier analysis of an EKG signal and its analysis by means of a wavelet function is that, whilst the Fourier transform employs a sinusoid function, a wavelet function is localised in time.

The methodology for such decomposition may include discretized continuous wavelet transforms, orthonormal wavelet transforms of decimated construction, non-decimated wavelet transforms, wavelet packet transforms and matching pursuit algorithms.

Signal processing employing wavelet transform analysis allows simultaneous elucidation of both spectral and temporal information carried within a signal. Such processing can employ either continuous or discrete transforms. The choice of wavelet transform used for a particular signal processing application depends on factors such as speed of computation necessary, the shape of signal specific features, the frequency resolution required, and the statistical analysis to be performed.

The preferred method employs the discretized continuous transform as it provides high resolution in wavelet space at lower frequencies.

This method thus employs the use of a discretized continuous wavelet transform to analyse a cardiac signal.

In particular, this method employs a wavelet transform as an interrogation tool for EKG signals of ventricular fibrillation.

A variety of wavelet functions are available, and the most appropriate is selected to analyse the signal to be investigated.

The wavelet transform of a continuous time signal, $x(t)$, is defined as:

$$T(a,b) = \frac{1}{w(a)} \int_{-\infty}^{\infty} x(t) \overline{g}\left(\frac{t-b}{a}\right) dt \qquad \text{equation 1}$$

where $g(t-b)/a)$ is the analysing wavelet function and '$\overline{\ }$' denotes complex conjugate. $w(a)$ is a scaling function usually of the form $w(a)=a^n$ where n is usually 1 or 0.5, and $x(t)$, in this application, is the single channel surface EKG time signal. The transform coefficients $T(a,b)$ are found for both specific locations on the signal, b, and for specific wavelet dilations, a. $T(a,b)$ is plotted against a and b in either a surface or contour plot.

While other wavelet types may be employed the wavelets mainly used in this method are: the Mexican hat wavelet and the Morlet wavelet, examples of which are shown in Figure 1.

The wavelet can translate along the signal (change in *b*) and dilate (change in *a*). This is shown schematically in Figure 2 using a Mexican hat wavelet.

Figure 3 illustrates the way in which a sinusoidal signal can be 'investigated' at various locations by Mexican hat wavelets of various sizes. The numerical value of the convolution (equation 1) depends upon both the location and dilation of the wavelet with respect to the signal.

Figure 3a shows a wavelet of similar 'size' to the sinusoidal waves superimposed on the signal at a *b* location which produces a reasonable matching of the wavelet and signal locally. From the Figure it is apparent that there is a high correlation between the signal and wavelet at this *a* scale and *b* location. Here, the cross correlation of the signal with the wavelet produces a large positive number $T(a,b)$.

Figures 3b and 3c show details of the wavelet transform of a signal using a wavelet of approximately the same shape and size as the signal in the vicinity of *b*. Figure 3b shows a wavelet of similar scale to the sinusoidal waveform located at maximum negative correlation. This produces a large negative $T(a,b)$ value. Figure 3c shows a wavelet of similar scale to the sinusoidal waveform located at a position on the time axis where near zero values of $T(a,b)$ are realised. Figure 3d shows the effect on the transform of using the smaller *a* scale. It can be seen from the plot that the positive and negative parts of the wavelet are all in the vicinity of approximately the

same part of the signal, producing a value of $T(a,b)$ near zero. Figure 3e shows that the same thing happens when using a much larger wavelet, since the wavelet transform now covers various positive and negative repeating parts of the signal, again producing a near zero value of $T(a,b)$.

Wavelet transforms are not usually computed at arbitrary dilations for isolated locations in the signal, but rather over a range of a and b. A plot of $T(a,b)$ versus a and b for sinusoidal data using the Mexican hat wavelet is shown in Figure 4. Two methods are then employed to plot $T(a,b)$, namely a contour plot or *scalogram* as shown in Figure 4b, and a surface plot as shown in Figure 4c. At small and large values of a, the near zero values of $T(a,b)$ are evident from the plots, but at values of a of the order of one quarter of the wavelength of the sinusoid large undulations in $T(a,b)$ correlate with the sinusoidal forms of the signal.

Figure 5a shows two superpositioned sinusoidal waveforms, the first with period P1, the second with period P2. P1 = 5P2. Figures 5b and 5c, the transform plots of the superimposed waveforms clearly show the two periodic waveforms in the signal at scales of one quarter of each period. Thus, Figure 5 clearly demonstrates the ability of the continuous wavelet transform to decompose the signal into its separate

frequency components. That is, this transform 'unfolds' the signal to show its constituent waveforms.

The contribution to the signal energy at a specific *a* scale and *b* location is proportional to the two-dimensional wavelet energy density function which is, in turn, proportional to the modulus of $T(a,b)$.

The method of the present invention thus involves the display of the transform as a contour plot. That is, the method is used to present information derived from an EKG trace of the heart in VF as a scalogram. The preferred form of presenting the information is as an *energy scalogram*, which presents the results as a plot showing the log of the wavelet energy coefficients, against the log of the bandpass centre frequency, f_{bpc}, of the wavelets for each time increment. The bandpass centre frequency is proportional to the reciprocal of the dilation value, *a*. This plot highlights small changes in amplitude over the scales of interest. The transform copes with repeating features in time with ~~shifting phase, making it appropriate for real time~~ applications such as this.

That is, by performing continuous wavelet transform analysis on the ECG in VF, and then by producing an *energy scalogram* of the results, it is possible to unfold the signal in such a way that a previously hidden structure is apparent, in contrast to the apparently disorganised VF signal.

The method then includes quantifying the wavelet decomposition. This wavelet decomposition provides both qualitative visual and measurable features of the EKG in wavelet space.

In practice, surface EKG tracings, recorded as soon as possible after the onset of VF, are analysed.

As a demonstration of the efficacy of the method, in an example of an experimental procedure utilising this method of analysis employing wavelet techniques, VF was induced in anaesthetised pigs via a pacemaker probe, using a 90V impulse at 60 Hz. All of the pigs remained in VF, untreated for a period of either 3 or 5 minutes. After this time, CPR commenced. The surface EKG (standard lead II) was recorded using needle electrodes. The EKG was sampled at 300 Hz using a 12-bit A to D converter. The method of the present invention was then performed using 32 EKG tracings recorded immediately after the onset of VF.

Figure 6a represents 4 beats of a pig heart in sinus rhythm. Figures 6b and 6c shows the wavelet transform of the signal displayed in two and three dimensions respectively.

The QRS complex of the waveform is evident from the conical structures in Figure 6b converging to the high frequency components of the RS spike. The P and T waves are also labelled in the plot. The 3D landscape plot of Figure 6c shows the morphology of the signal in

wavelet space. In Figures 6b and 6c the continuous horizontal band *(X)* is associated with a frequency of 1.7 Hz, the beat frequency of the sinus rhythm. The second band *(Y)* occurs at a frequency of approximately 5.1 Hz, corresponding to the separation of the P-QRS-T components in time. At higher frequencies the P, QRS and T components are individually resolved according to their frequency makeup and temporal location.

Figures 6d to 6g show the energy surfaces for four segments of EKG signal subsequent to the onset of VF, namely: (6d) 0-60 s; (6e) 60-100 s; (6f) 210-240 s; and (6g) 260-360 s.

The morphology of the VF signal in wavelet space can be seen from the Figures to contain underlying features within a more complex surface topography. The most significant features are the dominant ridges that appear in the transform surface through time.

Figure 6f shows these ridges quite clearly. A high-energy ridge can be observed at around 10 Hz and two lower energy bands can be observed at lower frequencies. These three ridges are labelled A, B and C, respectively, in the plot. Other ridges are also present within the scalogram.

The energy surface in Figure 6g contains the onset of CPR after 5 min of untreated VF. The institution of CPR is associated with a gradual increase in the passband frequencies of ridges A, B and C. This change in the composition of the VF signal reflects electrical

changes in the fibrillating myocardium associated with the onset of CPR. This is because CPR produces antegrade myocardial blood flow and thus improves the metabolic state of the tissues, temporarily reversing the otherwise progressive decline in high band pass frequency components of the EKG wavelet decomposition.

Figure 8a is a typical segment of an EKG trace of a pig heart in VF; Figures 8b, 8c, and 8d are the energy scalograms associated with the trace of Figure 8a. As clearly illustrated by these diagrams the principle dilation (band pass centre frequency) component of the scalogram is approximately 10Hz. However, using said method it is also apparent that this component is not constant. It 'pulses' with a degree of regularity. This structure is previously unreported.

Figure 9 shows similar 'pulsing' in another porcine EKG signal. However, the structure is so pronounced that high energy, high frequency, intermittent components can be observed. These components have an occurrence frequency of the order of the original sinus rhythm: approximately 1.7Hz.

Figure 10a is a human EKG signal segment containing a shock event. Figure 10b is the corresponding wavelet scalogram. It is apparent from the scalogram of Figure 10b that both high frequency spiking and an intermittent high-energy region are present in the vicinity of 10 Hz and also above 10Hz.

The high frequency spiking is unique to the method of the present invention and is not visible using conventional Fourier techniques. The rich structure made visible within the EKG by the wavelet transform method is evident in the scalogram.

It is clearly seen from the Figures that applying the wavelet transform to an EKG signal of VF demonstrates that this signal is a rich source of valuable information. That is, it produces a display showing real time visualisation of the distribution of energies and coherent structures within the signal for use by a clinician in the selection of treatment strategies.

Using this method of analysis it is feasible to obtain real-time visual display of the EKG frequency characteristics in the wavelet domain during resuscitation. The scalogram produced provides information about the myocardium that is not available from a standard single channel surface EKG.

The wavelet scalogram decomposition can be displayed as a real time scrolling window, as shown in Figure 9. This window is useful as an aid for clinical decision making. It can be used as a stand-alone tool, or as basis for on-line statistical analysis of the current state of a heart.

To produce the window, a MATLAB TM R11 application is used. Each EKG sample taken results in the updating of a FIFO (First In First Out) buffer, and the EKG plot of Figure 9a. The scalogram of Figure 9b is then shifted

to the right and clipped before the 'missing' new right hand data is calculated, using conventional matrix algebra, and filled.

This results in the two scrolling windows of Figure 9. The exponential ramp in the bottom right corner shows the compact support of the wavelet utilised at the given scale.

Higher resolution scalograms are achieved through implementation on higher specification machines, purpose built hardware, or application specific software with coding using a lower level programming language, such as C++.

CPR produces artefacts in the EKG signal. Additionally, this method delivers information the value of which is not degraded once the CPR artefacts are filtered from the EKG signal.

From examination of the *scalograms* shown in Figures 6g, 7a and 7b it can be seen that the VF signature and the signature of the CPR artefacts occupy distinct areas of the scalogram, which permits their separation.

Known techniques such as the Modulus maxima method are now available to reduce the non-zero data points in the wavelet scalogram. This method reduces the topography of the scalogram surface to a series of ridges, thereby

considerably reducing the amount of data required to represent the signal in the wavelet space.

The modulus maxima obtained from a bandlimited signal with a wavelet of finite compact support in the frequency domain defines a complete and stable signal representation.

In this method, temporal filtering of the original EKG signal to disassociate the CPR signature from the heart signal can either be done directly, using the wavelet *energy scalograms*, or indirectly through modulus maxima techniques. This allows the heart to be monitored without necessitating cessation of CPR to allow rhythm recognition.

Further to the above, the method may also be applied to patients suffering form atrial fibrillation (AF) as a means of disassociating the prevalent QRS and T waves from the remainder of the signal.

Wavelet decomposition of the ECG signal is performed using an appropriate wavelet function. The modulus maxima technique is used to encapsulate the scalogram information in a series of ridges. Filtering of the signal is then undertaken using the modulus maxima information and through reconstruction the clinically useful information is isolated from the signal .

Specifically, Figure 15a shows the wavelet transform decomposition of a 2 second segment of ECG taken from a patient with atrial fibrillation. Below the ECG trace

is a wavelet scalogram plot. The corresponding modulus maxima of the scalogram is plotted below the scalogram.

For example, Figure 15d contains a 7 second segment of ECG exhibiting AF. The signal has been partitioned using a modulus maxima ridge following algorithm. The modulus maxima ridges have been separated into large and small scale features by thresholding the signal at a predetermined wavelet scale. A blow up of part of the signal is given in the lower three plots in the figure: Figures 15g, 15h and 15i. The middle of these plots contains the partitioned signal with the QRS complex and T wave filtered out revealing regular, coherent features that appear at a frequency of approximately 400 beats per minute, typical of AF. The lower plot contains the partition with the filtered out QRS and T waves. Although, a relatively simple modulus maxima technique was used in this pilot study whereby the modulus maxima lines were simple partitioned into two subsets, the ability of the technique to separate the signal into QRS and T waves and underlying atrial activity is evident from the results. It is known that the decay in amplitude of a modulus maxima corresponding to a signal feature can be a function of the scale of the wavelet. It is possible to use this property to separate the ridge coefficients into a noisy and coherent part. In this way, further differentiation of the modulus maxima information can be implemented within a more sophisticated algorithm. This will facilitate the further separation of background noise, QRS and T waves, and atrial activity.

This method thus facilitates useful interpretation of previously unintelligible EKG signals.

In patients presenting with uncoordinated rapid electric activity of the ventricle of heart, known as ventricular fibrillation (VF), there is no effective pulse and myocardial blood flow ceases. Even the institution of optimal cardio-pulmonary resuscitation (CPR) of the patient does not achieve more than 30% of the normal cardiac output. Ischaemia during cardiac arrest leads to a rapid depletion of myocardial high-energy phosphates, deterioration of transmembrane potentials, and disruption of intracellular calcium balance. Paradoxically, the myocardium in VF has supranormal metabolic demands. For this reason resuscitation attempts become less likely to succeed with the passage of time, and electrical defibrillating shocks increasingly result in asystole or EMD.

After prolonged cardiac arrest, the use of pharmacological measures or CPR before attempting defibrillation may increase the chances of successful resuscitation. This invention provides a robust and reliable method of analysis of the state of the myocardium in VF that prevents attempts to defibrillate at times that are unlikely to be successful, or even harmful to the heart. This method also provides an indication of the best way in which to optimise the metabolic state of the heart prior to counter-shock.

The method includes steps to establish a standard against which to evaluate collected data in a particular incidence.

The method further employs use of measurable signal characteristics derived from the position and amplitude of features in the *scalogram* to estimate both the condition of the myocardium, and downtime of the subject while in VF.

The method thus provides for optimal treatment of the heart in VF, so fulfilling specific patient needs, by therapeutic intervention, if appropriate.

An energy scalogram such as that shown in Figure 7 displays three distinct bands, labelled A, B, C. It is possible to derive quantifiable measures using correlations between the location and energy content of the bands.

Band A of Figure 7b represents the dominant energy band seen in the *scalogram* of Figure 7a, and corresponds to the tachycardic beating of VF. However the *scalogram* is much more informative in that it also shows, as bands B and C, the behaviour of other frequency components of the signal which were previously unreported.

Figure 7a shows a 2D *energy scalogram*. It includes the first 5 minute period of VF, followed by a 2.5 minute period of CPR. The onset of CPR is clearly identified by the distinct horizontal dark band in the lower right

quadrant of the Figure. Over the first 5 minute period, three bands, labelled A, B, C, can be clearly seen in the scalograms. These bands correspond to the ridges of Figures 6d to g. The increase in the frequency components of these three bands after the onset of CPR is evident in the plot. Bands B and C follow trajectories similar to each other in the *scalogram*, reducing in frequency over time. Band A, however, moves independently of the other two. Initially Band A increases, then it decreases to a local minimum value at approximately 70s. Between 70 and 160s it increases relative to Bands B and C. Finally, it decreases until the start of CPR after 300s. The same pattern was present in all 32 pig EKG traces of the experiment.

Obvious increases in the passband frequency of all three bands are observed in the *scalogram* after the onset of CPR. For some of the signals studied this increase in band C is masked by the dominant CPR band, and thus cannot be seen in the *scalogram*.

Figure 7b provides a schematic diagram of the salient features contained within the scalogram plots, where t0 is immediately after the onset of VF; t2 is the start of CPR; and t3 is the end of the analysis. Figure 7c shows the relative proportion of energy contained in the scalogram in the 5 to 12 Hz region through time. There is an obvious decay in the relative energy associated with this region which is associated with the breakdown of co-ordinated activity in the heart.

The steps of the method of the present invention described above establish that during the course of VF there is a reduction in the proportion of energy within the dominant frequency band indicated in Figure 7c. This dominant frequency band, Band A in Figure 7a, is demonstrated to be approximately 10 Hz for pig VF.

The energy within this band changes rapidly. This is illustrated by the 'pulses' in Figures 8,9,10.

The Figures 6,7,8,9,10 show that applying the wavelet transform to an EKG signal of VF demonstrates that this signal is a rich source of valuable information.

The underlying hypothesis of the method of the present invention is that the scalogram associated with an EKG correlates to the state of the myocardium as it decays subsequent to the onset of VF.

The method uses the information contained in the energy scalogram associated with an EKG to predict the likely success of clinical intervention, namely shocking.

It is therefore possible to develop a wavelet transform based tool for the prediction of shock outcome during ventricular fibrillation by:

1. collecting and collating data from sets of archived EKGs recorded from humans in VF where attempts to resuscitate by shocking were made; and

2. developing a classifier for reference purposes.

Figure 11 is a classification of the shock outcome in either asystole or a rhythmic response using a relatively simple statistical analysis. The experiment yielding the results to compile these Figures involved use of the lead II outputs of standard three lead EKGs of 120 patients in VF. Each trace is of three second duration sampled at 100 Hz. Of these patients, 60 returned to sinus rhythm while the other 60 deteriorated to asystole, post shock.

Each trace was decomposed into an associated wavelet transform from which its energy scalogram was generated. The volume under this surface was then normalised to render the results independent of signal amplitude, but instead the result of the relative wavelet constituents of the signals. The log of the mean values at each dilation (band centre frequency) for each was then recorded. Figures 11a and 11b show the distribution of energies in a lower frequency band (1.9 Hz) and at the 9.3 Hz band. Clearly, through visual inspection, it is apparent that the proportion of energies around the 10 Hz band is higher for successful defibrillation attempts.

The method then extends to apply neural techniques to analysis of wavelet pre-processed EKG signals.

A pilot study conducted to determine the feasibility of using artificial neural techniques to provide a tool to predict the outcome of defibrillation during VF used eight human EKG trace segments containing shock events.

In these cases, the result of shocking was unequivocal - four patients returned to VF, and four experienced return of spontaneous circulation (ROSC).

The traces were transformed using the Morlet wavelet, and energy scalograms containing thirty frequency levels were produced. This was then split into eight overlapping sections as shown in Figure 12a, each of 200 points (2/3 seconds duration). These 200 location points were subsampled down to 50 to give eight scalograms for each trace of 50 x 30 elements. The volume under the energy scalograms were normalised and the patterns fed into a 'winner take all' Kohonen network with two output units and built in *conscience* (to avoid local minima). That is, the network was asked to group the 64 input patterns into two classes. All but ten outputs were collectively classified correctly giving a mean pattern error of 0.156 (against 0.5 average pattern error expected from random inputs).

Since this is a vector quantisation method (VQM) it was possible to identify how the network differentiates the patterns through inspection of its connective weights. The weights from each location position across all scales in the network are approximately the same, which means that there are no markers with which to synchronise the different pre-processed traces. This confirms that this neural network is too simple for this purpose. That is the network is not equipped to 'consider' the relative phase of each input pattern.

Figure 12b shows the weights for the 'success' (ROSC) and 'failure' (VF) to the output units from the first two time slices across all scales. The weights indicate the classes are differentiated by the proportion of energy in the lower scales, which can be seen when compared with Figure 11.

Although the above described method indicates the slight drop in the dominant frequency expected, the drop is very marginal which leads to the conclusion of the lack of competence of previously proposed methods as a defibrillation success predictor.

In summary, a library of human ECG data containing data sets of human VF with attempts to resuscitate by shocking is used as a database. This database is extended to include data sets containing various methods of shocking including, for example, biphasic shocking. The biphasic shock waveform has resulted in an increased proportion of successful defibrillation attempts and is set to become the standard treatment for cases of VF.

In one example, the recognised outcomes are defined by trace components of the post-shock window lasting until next shock (if present). If the ratio of the given rhythm exceeds 10% of the total window length the rhythms are prioritised according to the sequence:

Class	**Rhythm**	**Ratio**
1	Pulse (SVR)	+10%

2	No pulse (EMD)	+10%
3	Isoelectric (Asystole)	+10%
4	VF	+10%

Class 5 is the class of VF preceding shocks where VF re-establishes itself within 5 seconds following the shock (i.e. no change). The VF in all the other classes were non-VF in this period.

Wavelet analysis of this information in accordance with the method of the invention is then performed to:

construct a wavelet visualisation of the signal - usually by plotting wavelet energy surfaces against the location parameter *b* and the inverse of the dilation parameter *a*;

provide measurable characteristics of the signal for estimation of downtime of the patient;

provide measurable characteristics of the signal for determining the health of the heart post CPR; and

to construct energy scalogram devised for the method - which uses the energy density function and the reciprocal of the wavelet *a* scale for use as a predictor tool.

As described above it is possible to use artificial neural network based techniques to develop such an indication of the state of myocardium. In the

alternative, it is possible to classify the wavelet scalogram through multilayered feedforward network types.

The method may include the development of a modulus maxima algorithm tool for the preprocessing of ECG prior to its input into a neural network classifier.

Using this technique improves network performance whether this data is further encoded, or presented as a whole, larger, sparse matrix as a pattern in the input space.

This method therefore utilises the generalisation properties of a feed forward multi-layer network to predict the likelihood of defibrillation success from the wavelet transform of the EKG traces. This multi-layer network with its relatively simple dynamics, when combined with wavelet pre-processing, has proved itself a useful tool as a universal approximator.

The classes of multi-layer network types of use in this method are:

- Multi-layered feed forward (MLFF) neural networks with back propagation training and monotonic activation functions; and
- Radial Basis Neural Networks (RBNN) as have previously been successfully applied to the denoising of medical Doppler ultrasound signals with wavelet preprocessing.

As described above, the method involves the decomposition of EKG signals into a complete basis set defined by the wavelet shape and other parameters by salient basis functions of a different basis set, converged upon through regression techniques (sigmoid in the case of multilayer neural networks, Radial basis etc).

These regression techniques can also be used to construct a wavelet basis function set directly.

Methodologies for restricting the search space of the wavelet basis functions considered are known. Whilst this wavelet network has been shown to be effective for chaotic time series prediction, its implementation involves the use of wavelet *frames* of a decimated, dyadic, construction. The method of the present invention may employ continuous wavelet networks spanning a redundant wavelet *basis* which, although computationally more expensive, overcomes the time invariance constraint and the limited size of input space associated with use of wavelet frames.

The method may use conventional gradient decent methods to produce a single layer wavelet classifier.

These wavelet networks may be further employed as part of a multilayer system as a non-parameterised estimate of the original trace for input to further hidden layers.

The network type of choice for the automated prediction system of the method is selected on the basis of its sensitivity and selectivity in correctly classifying successful defibrillation outcomes in test set data, since this is most clinically useful.

Thus experimental comparison of the three techniques demonstrates the efficacy of the wavelet transform technique.

The nature of underlying atrial activity can also be determined from wavelet decomposition of the EKG signal. The wavelet function gives information regarding the amplitude and, where appropriate, phase of the transformed signal. It is known that pressure readings taken from the aorta correlate to forms of atrial activity within the heart. Areas of localised high energy contained within the scalogram can be demonstrated to correlate with these pressure readings. This experimental result is extrapolated to mean that areas of localised high energy contained within the scalogram correlate with forms of atrial activity within the heart.

Figure 13a shows the aorta pressure, Figure 13b the EKG trace, for the same time period as Figure 13a, and Figure 13c shows the scalogram for the EKG of Figure 13b. It is apparent that there is an increase in energy in the system during an atrial pulse, indicated by the dark blotches occurring in the scalogram at an f_{bpc} of around 10 Hz. There is a frequency component between 1 and 2 Hz. As shown in Figure 13d, which

highlights the phase of the scalogram between 1 and 2 Hz, it is apparent hat the lines of zero phase are in alignment with the atrial pulse.

In a further scalogram, shown in Figure 13e, produced by using the Mexican hat wavelet transform which is real and has better temporal resolution, but worse frequency resolution than the complex scalogram of Figure 13c, it is demonstrated that positive high amplitude components are shown at the same positions for scales of between 1 and 2 Hz, thus reinforcing the findings extrapolated from Figure 13c. That is as shown in Figure 13f, the lines of zero phase correlate with the pulse position.

The lines of zero phase within the 1.8Hz frequency band also align with regular peaks in the scalograms, as shown in Figures 14a, 14b & 14c. This links the presence of the 1.8 Hz band with the observed peaks at higher frequencies. This correlation between the 1.8 Hz band and the aorta pressure pulse suggests atrial activity is present.

In a further application of the method, means for identifying the optimum timing for application of the defibrillation shock can be extrapolated from the pulsing identified by the wavelet technique and shown in Figures 8, 9, 10, and 14, by comparison with traces of attempts at defibrillation which initially fail but are subsequently successful.

Thus, any data sets, in the above, that correspond to multiple shocking of the same patient, where defibrillation has been repeatedly attempted are considered separately since these traces hold important information.

The pilot study detailed above used Morlet wavelet based energy scalogram decomposition of signal segments immediately prior to shocking. A full parametric wavelet study of the method determines the optimum method.

The method includes the development of a classifier using the wavelet transform analysis.

Various types of neural network classifier are achievable using this method.

The linkage of shock timing to the phase information of wavelet components allows for increased defibrillation success and reduced shock energies. The wavelet-derived information can also be employed to predict the likelihood of shock success, preventing futile or harmful defibrillation attempts, and providing a predictor of an optimal resuscitation strategy or strategies.

This method demonstrates the utility of the wavelet transform as a new method of EKG signal analysis during VF. It provides a robust, real-time solution to the

problem of useful monitoring of the myocardium during resuscitation.

When compared with conventional statistical methods, such as fast Fourier transforms, it is seen that the temporal resolution of the wavelet technique gives a scalogram which better describes the non-stationary, intermittent, nature of the EKG trace to be analysed, and gives a method of greater predictive effectiveness than is already known. The effectiveness criteria for the networks of the method of the present invention are based upon their sensitivity and selectivity in correctly classifying successful defibrillation outcomes from test data sets.

Although this description refers to wavelet transform analysis, this term is to be construed to include matching pursuit algorithms and similar analysis techniques.

Modifications and improvements can be made to the above without departing from the scope of the invention.

CLAIMS

1. A method of decomposition of waveforms in a cardiac signal using wavelet transform analysis.

2. A method as claimed in Claim 1 comprising the step of employing discretized wavelet transform analysis to process the said waveform.

3. A method as claimed in Claim 1 comprising the step of employing discretized continuous wavelet transform analysis to process the cardiac waveform.

4. A method as claimed in any preceding claim comprising the steps of deriving the wavelet energy surfaces of an electrocardiogram (EKG) signal; and plotting said wavelet energy surfaces against a location parameter b, and a scale parameter.

5. A method as claimed in Claim 4 wherein said scale parameter is dilation a.

6. A method as claimed in Claim 4 wherein said scale parameter is band pass frequency f_{bpc}.

7. A method as claimed in any preceding claim comprising the initial steps of connecting electrodes to a presenting patient; and sampling the analogue input signals recorded to derive the cardiac signal.

8. A method as claimed in any preceding claim including visually displaying the cardiac signal.

9. A method as claimed in any preceding claim including visually displaying the distribution of energies within the cardiac signal.

10. A method as claimed in any preceding claim including visually displaying coherent structures within the cardiac signal.

11. A method as claimed in any preceding claim including visually displaying the signal in real-time for clinical use.

12. A method as claimed in any preceding claim comprising the step of constructing a contour plot to display the decomposed waveform obtained.

13. A method as claimed in any preceding claim comprising the step of constructing a surface plot to display the decomposed waveform obtained.

14. A method as claimed in any preceding claim comprising the step of constructing a 2D or a 3D energy scalogram to display the decomposed waveform obtained.

15. A method as claimed in any preceding claim including the step of disassociating the component features of the temporal trace of a recorded EKG.

16. A method for the analysis of an EKG of a heart in ventricular fibrillation including the method as claimed in any preceding claim.

17. A method for the analysis of an EKG of a heart in ventricular fibrillation after the commencement of cardio-pulmonary resuscitation (CPR) including the method as claimed in any of Claims 1 to 15.

18. A method as claimed in Claim 17 including the step of temporal filtering of the EKG signal of a heart that is subject to CPR to disassociate the CPR signal from the heart signal.

19. A method as claimed in Claim 17 or Claim 18 using wavelet *energy scalograms*.

20. A method as claimed in Claim 17 or Claim 18 using ridge following techniques

21. A method as claimed in Claim 20 wherein said ridge following techniques are modulus maxima techniques.

22. A method for the estimation of the health of a heart in VF including the method of any of Claims 1 to 15 to provide measurable characteristics.

23. A method as claimed in Claim 22 wherein said measurable characteristics are used to provide an estimate of the time elapsed since the onset of a cardiac incident.

24. A method as claimed in Claim 22 wherein said measurable characteristics are used to provide an estimate of the health of a heart after commencement of CPR.

25. A method as claimed in any of Claims 22 to 24 wherein said measurable characteristics are used to predict the outcome of a given therapeutic intervention.

26. A method as claimed in any of Claims 22 to 25 wherein said measurable characteristics are used to provide a guide for the optimal timing of defibrillation of a heart in VF.

27. A method for the analysis of an EKG of a heart in atrial fibrillation including the method as claimed in any of Claims 1 to 14.

28. A method as claimed in Claim 27 including the step of partitioning the signal to provide separate traces of QRS and T waves, and/or atrial activity and/or background noise.

29. A method as claimed in any preceding claim including the step of constructing a damage index for reference purposes.

30. A method as claimed in Claim 29 wherein construction of said index includes the step of developing network classifier from a library of recorded data.

31. A method as claimed in Claim 30 wherein said network classifier developed is a neural network.

32. A method as claimed in any of Claims 29 to 31 wherein said network classifier developed is a wavelet network classifier.

33. A method of decomposition of cardiac waveforms using matching pursuit algorithms.

34. Apparatus for decomposition of waveforms in a cardiac signal, said apparatus comprising wavelet transform analysis means.

35. Apparatus as claimed in Claim 34 including means to display the distribution of energies within a waveform.

36. Apparatus as claimed in Claim 34 or Claim 35 including a monitor adapted to display decomposed waveforms.

37. Apparatus as claimed any of Claims 34 to 36 adapted for inclusion in an EKG apparatus.

38. Defibrillation means adapted to operate in response to a signal generated by comparison of an EKG trace with decomposed waveform obtained by the method of any of Claims 1 to 33.

39. A method as described in any of Claims 1 to 33 with reference to or as shown in the accompanying drawings.

40. Apparatus as described in any of Claims 34 to 38 with reference to or as shown in the accompanying drawings.

ABSTRACT

A method of analysis of medical signals which uses wavelet transform analysis to decompose cardiac signals. Apparatus for carrying out the method, and cardiac apparatus adapted to employ the method are also described.

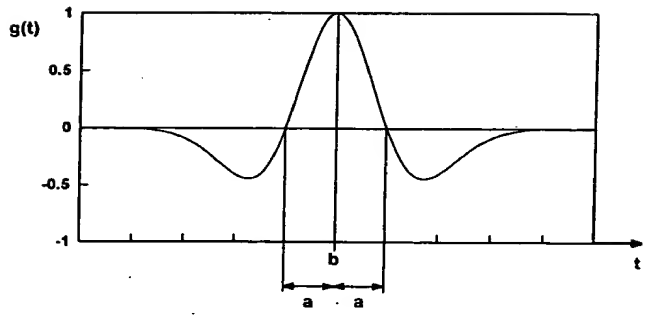

Figure 1(a)

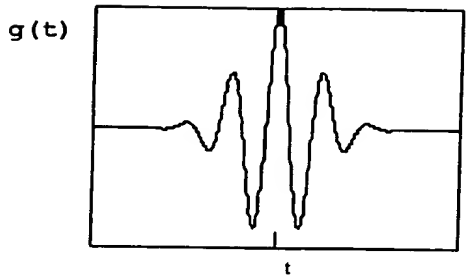

Figure 1(b)

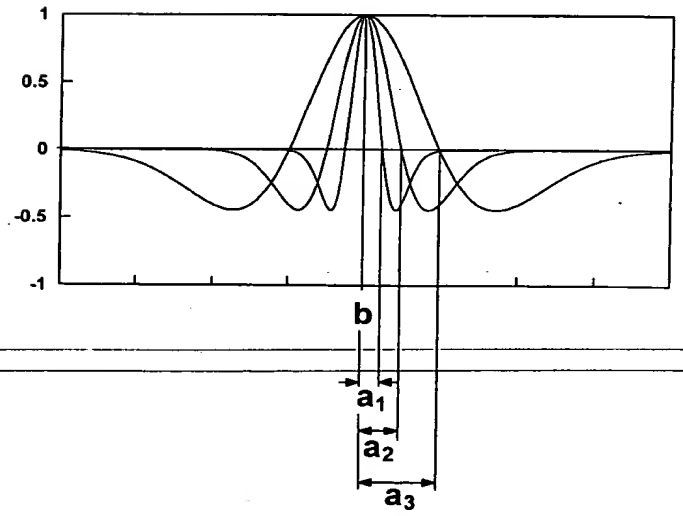

Figure 2(a)

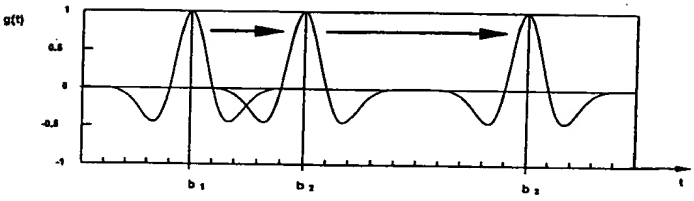

Figure 2(b)

Figure 3 (a)

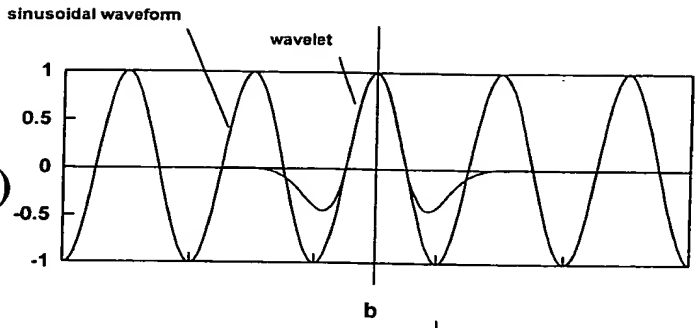

Figure 3 (b)

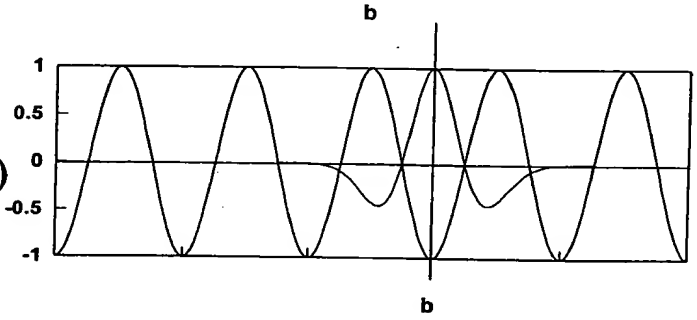

Figure 3 (c)

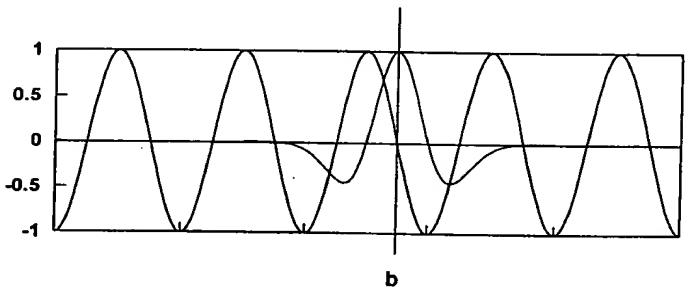

Figure 3 (d)

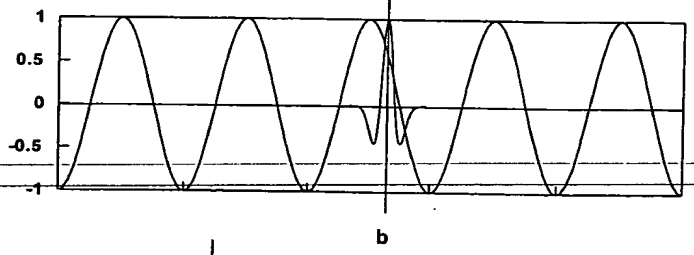

Figure 3 (e)

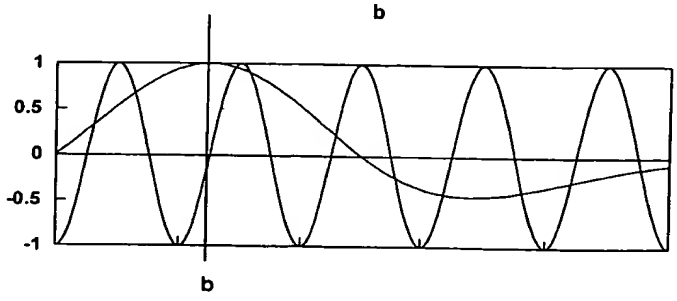

Figure 4 (a)



Figure 5 (a)



Figure 4 (b)

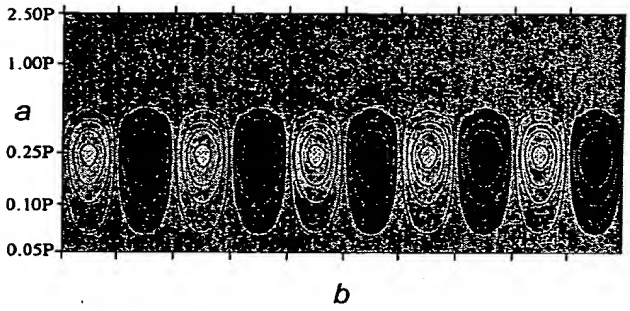

Figure 5 (b)

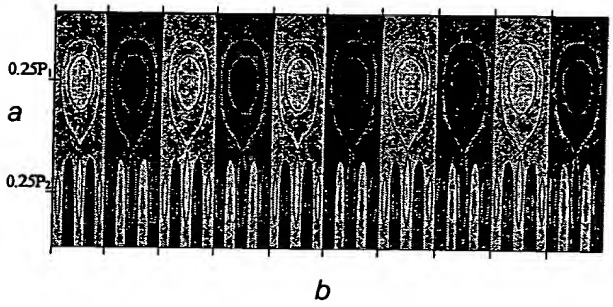

Figure 4 (c)

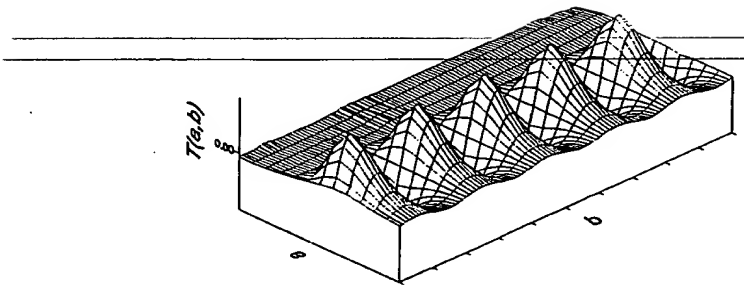

Figure 5 (c)

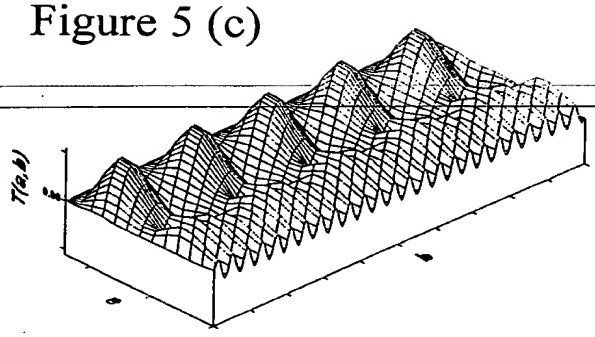

Figure 6 (a)

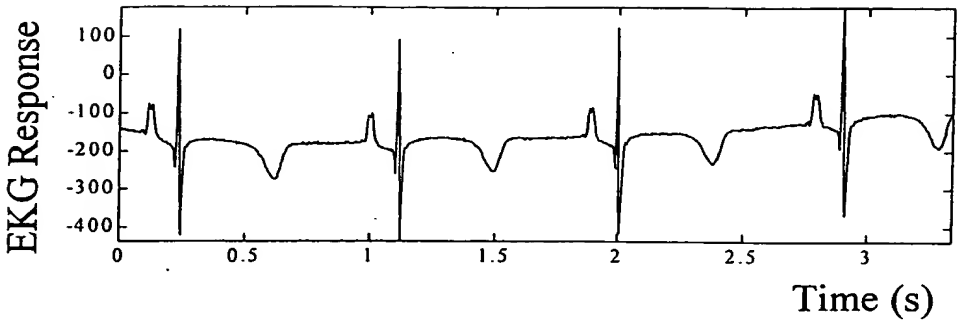

Figure 6 (b)

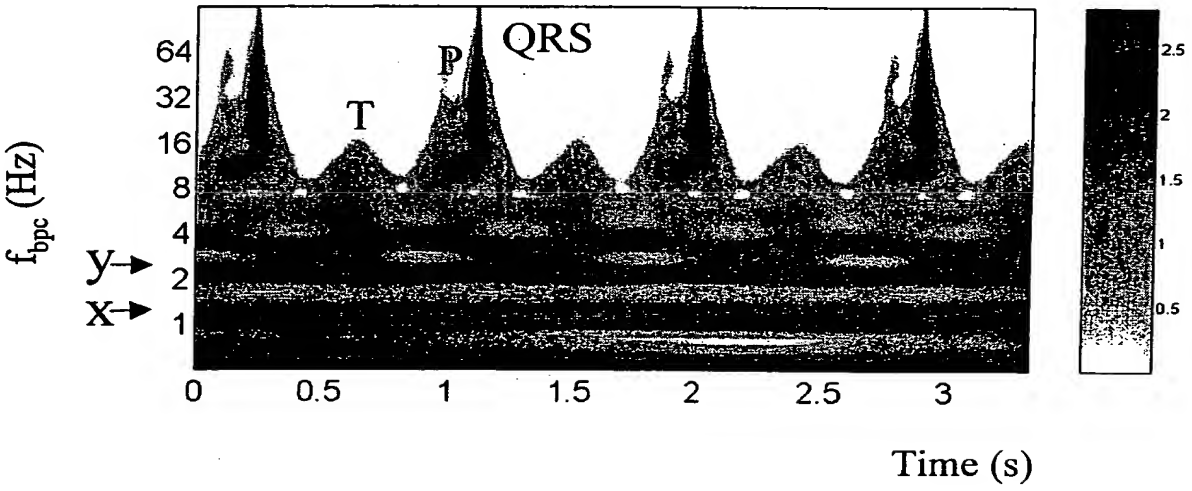

Figure 6 (c)

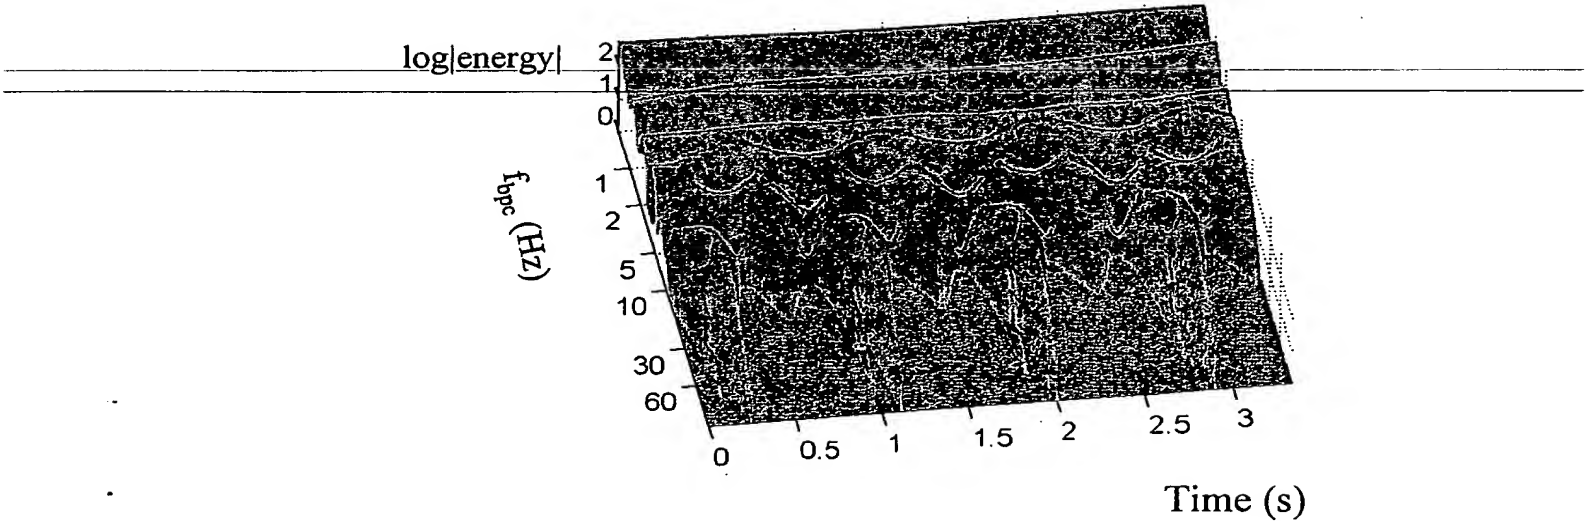

Figure 6 (d)

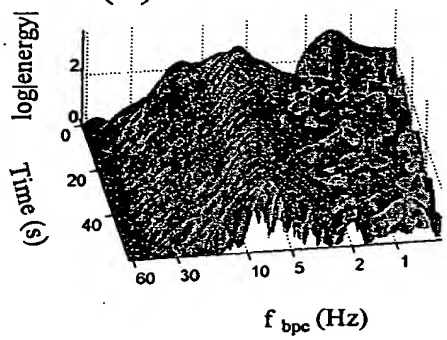

Figure 6 (e)

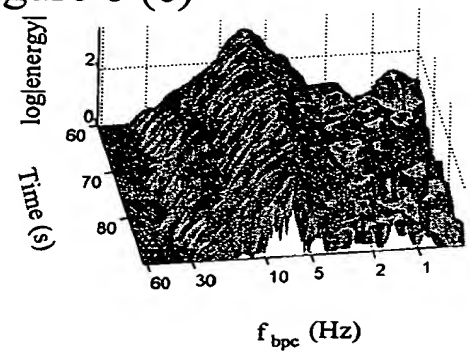

Figure 6 (f)

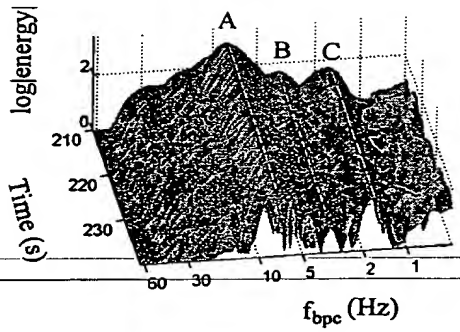

Figure 6 (g)

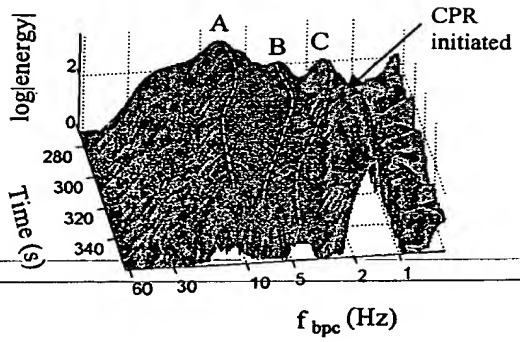

Figure 7 (a)

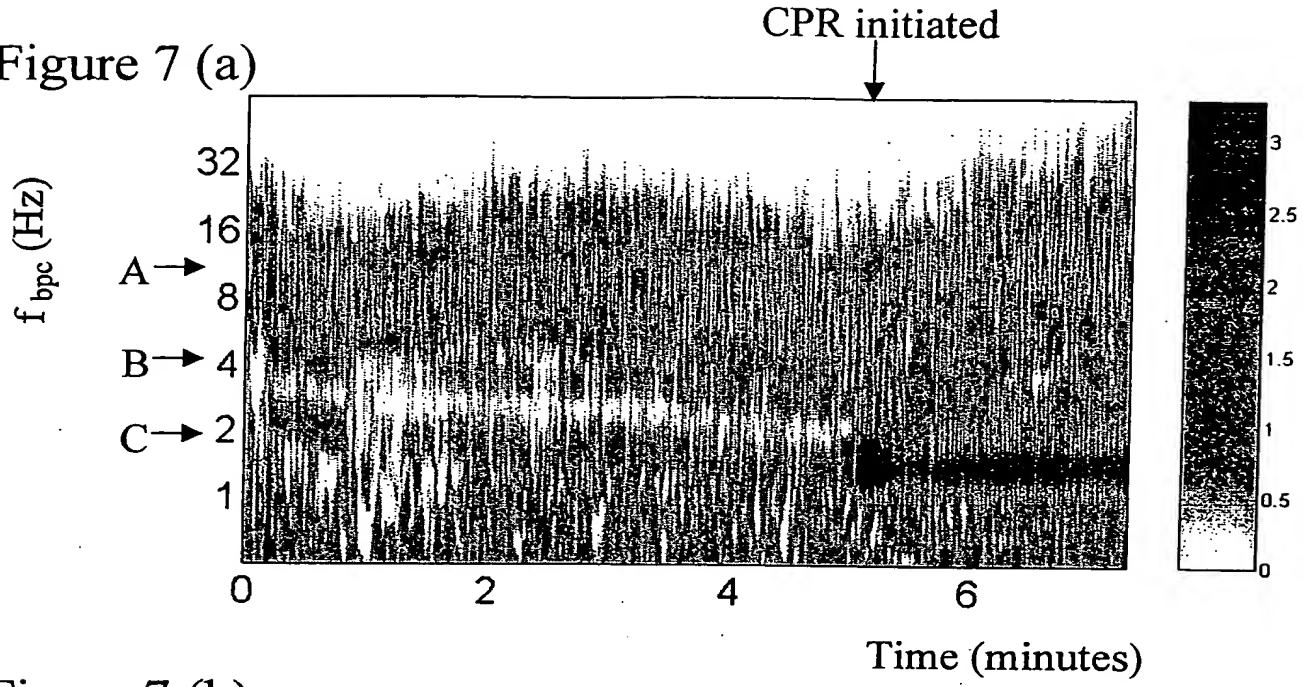

Figure 7 (b)

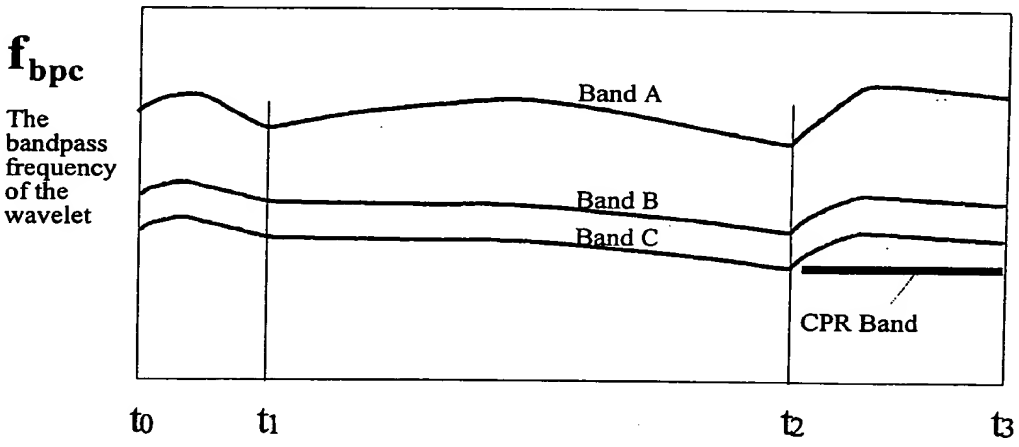

Figure 7 (c)

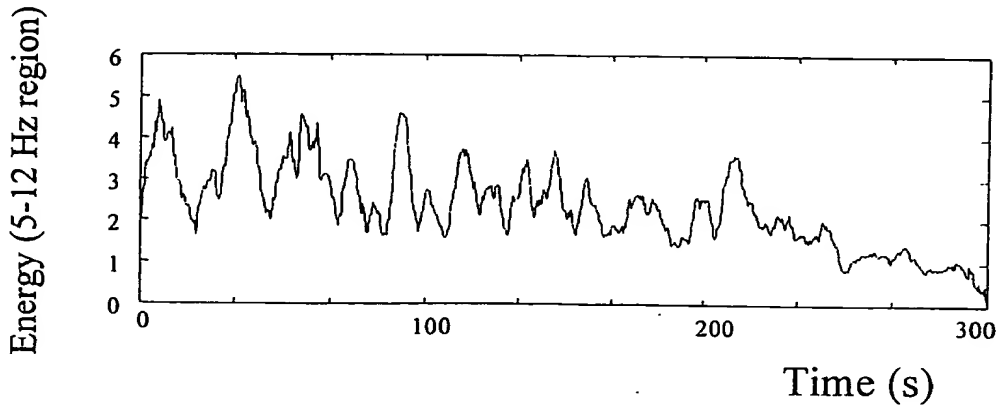

Figure 8 (a)

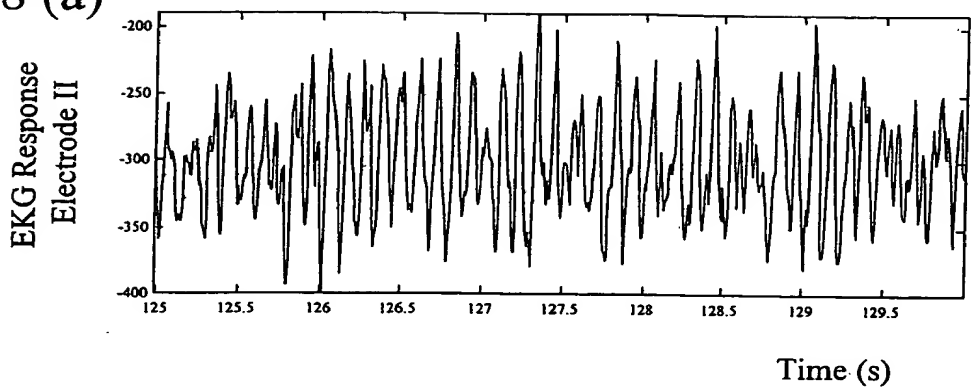

Figure 8 (b)

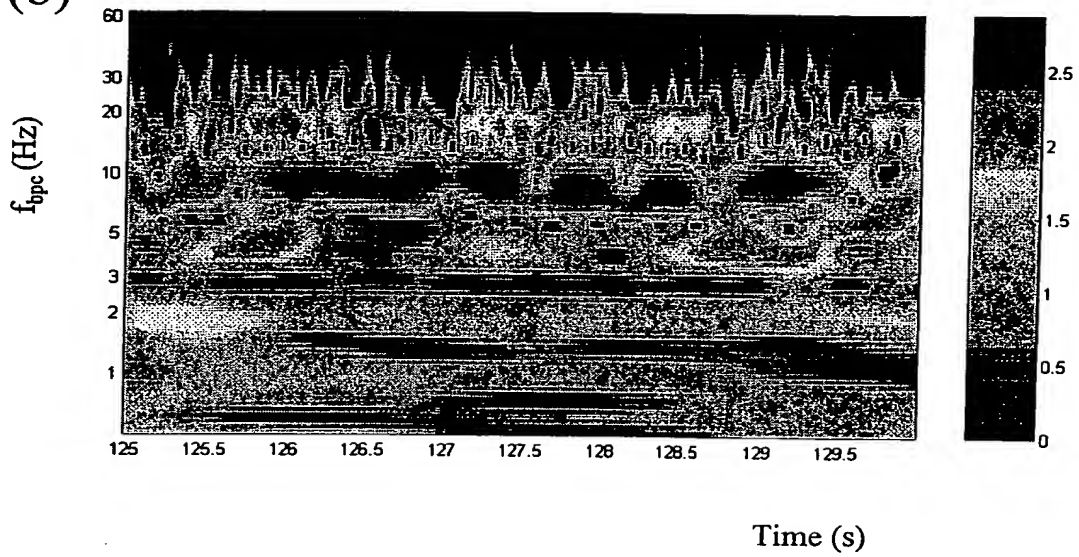

Figure 8 (c)

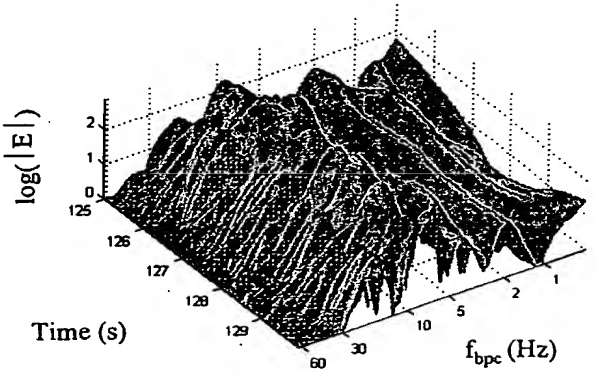

Figure 8 (d)

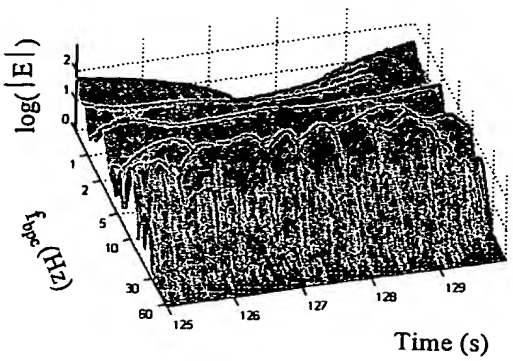

Figure 9

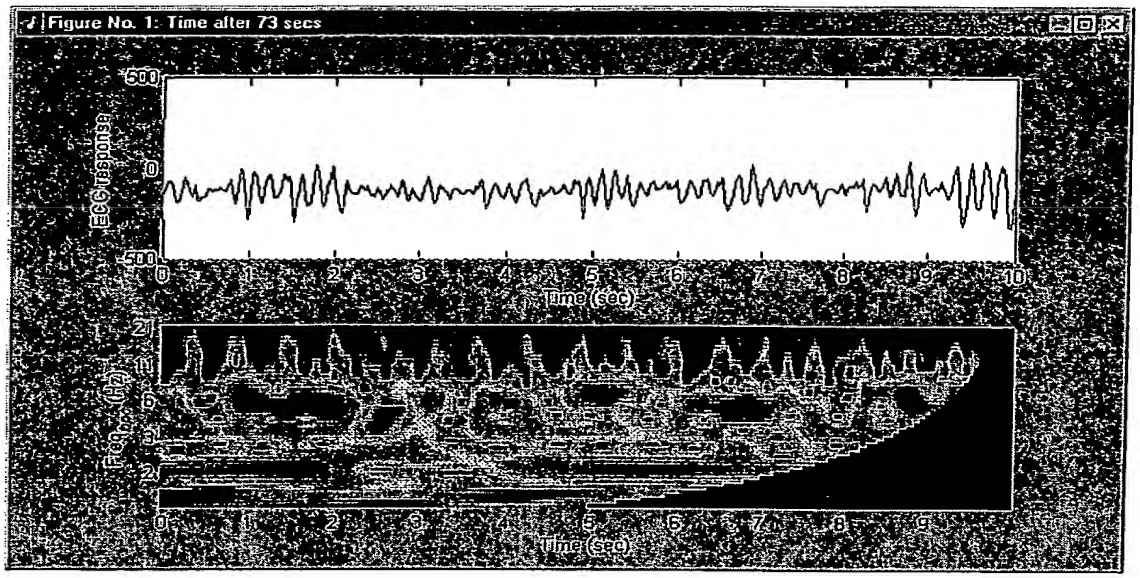

Figure 10 (a)

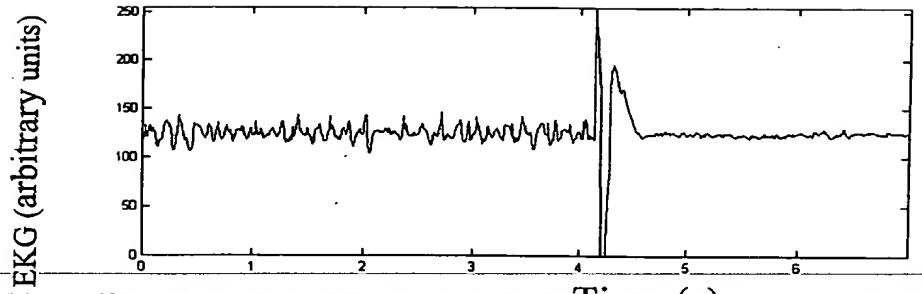

Figure 10 (b)

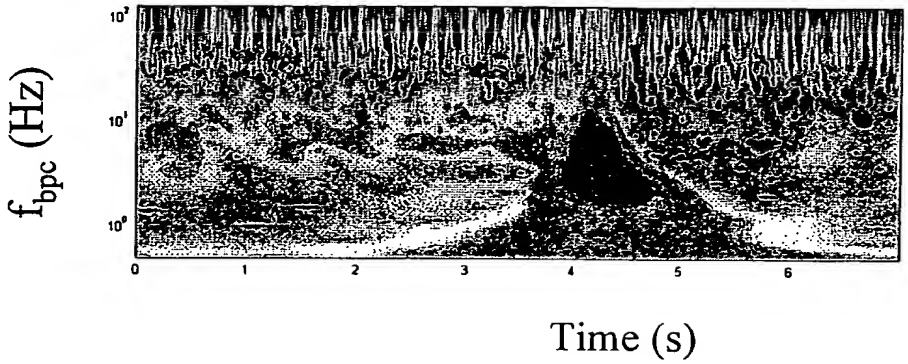

Figure 11 (a)

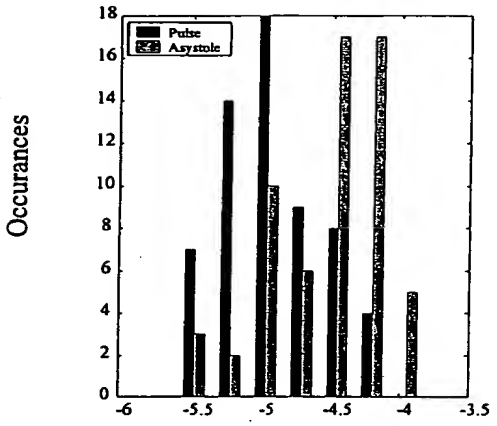

1.9 Hz

Figure 11 (b)

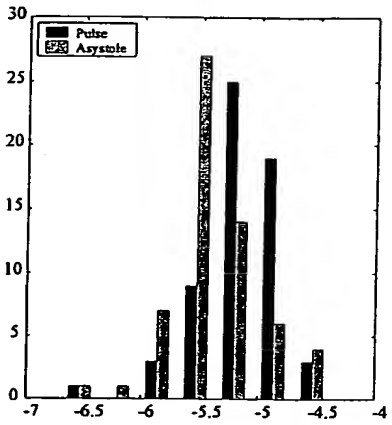

9.3 Hz

mean energy (log)

Figure 12 (a)

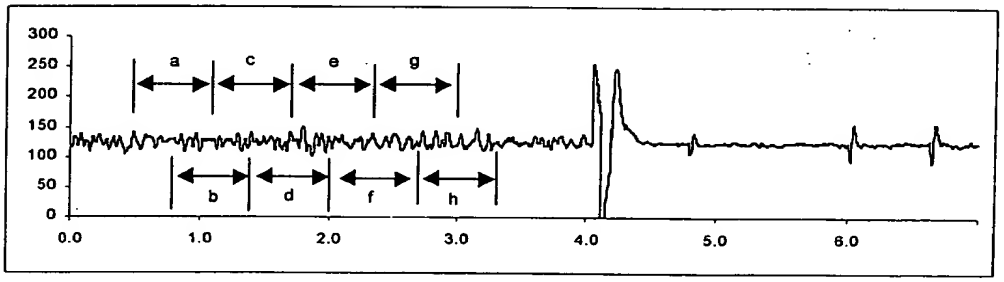

Weight value

Figure 12 (b)

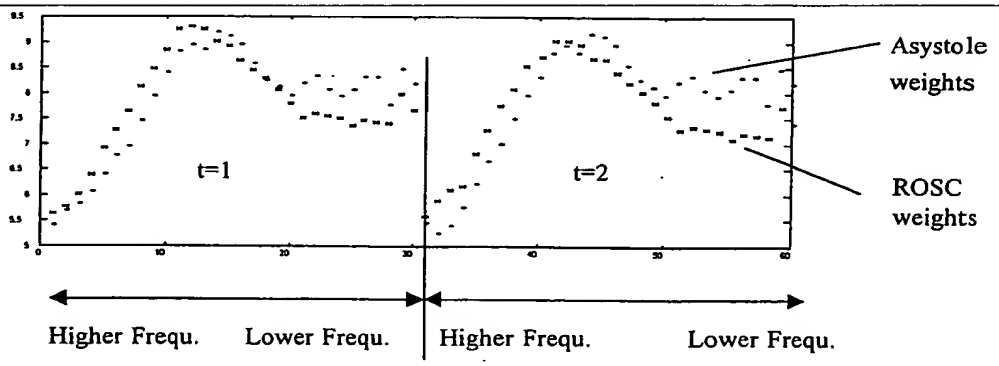

Figure 13 (a)

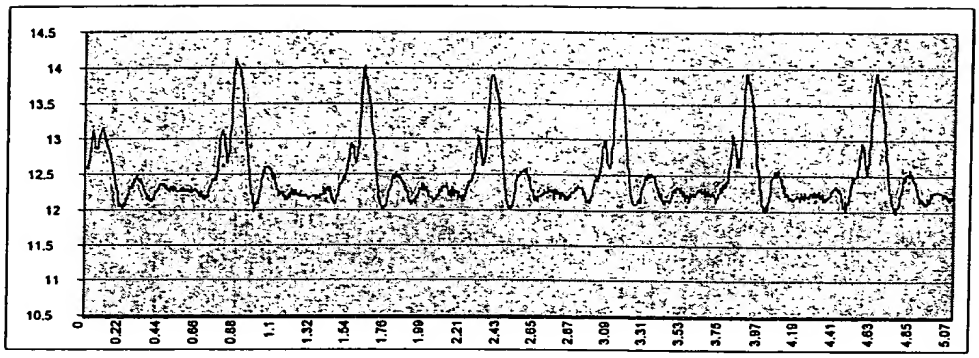

Figure 13 (b)

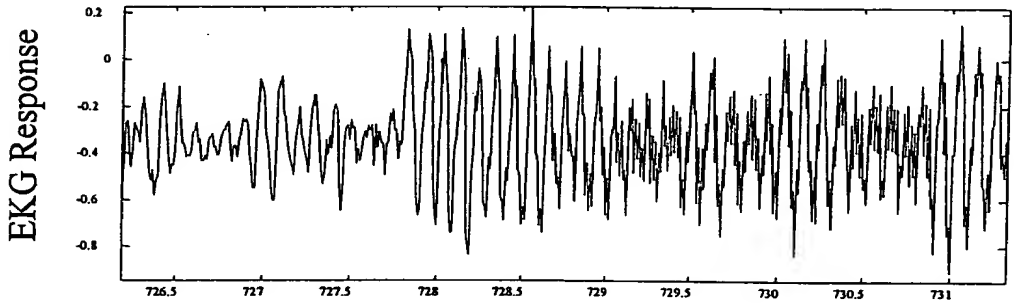

Figure 13 (c)

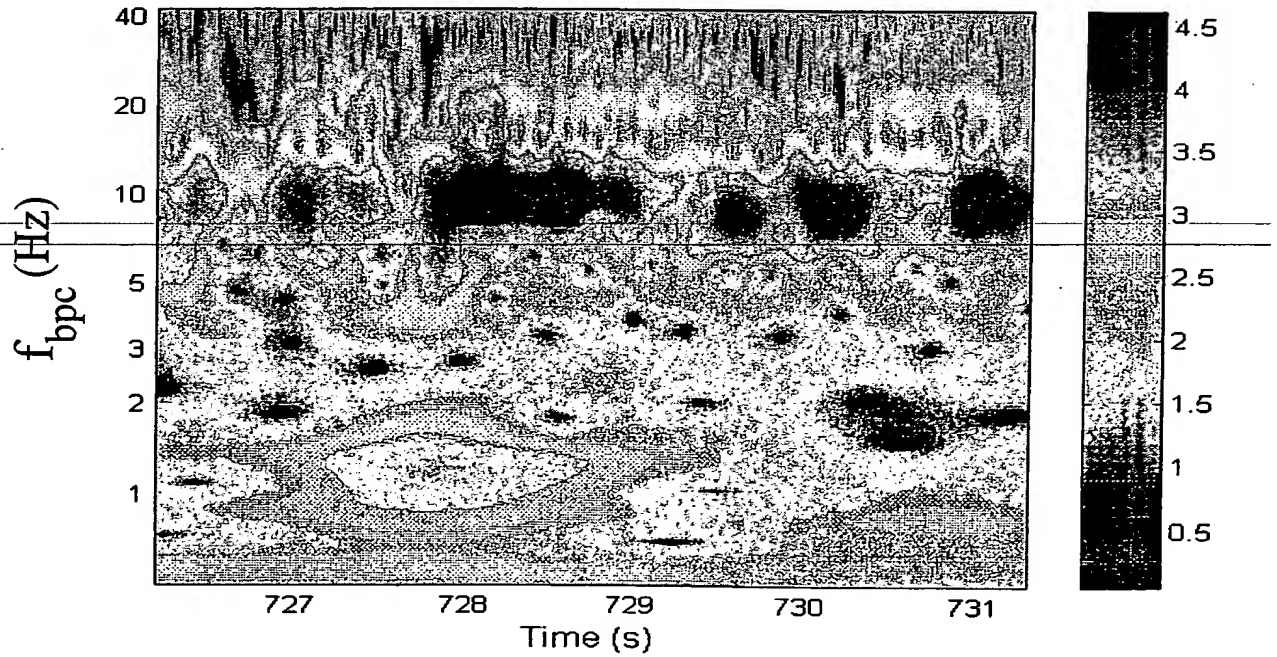

Figure 13 (d)

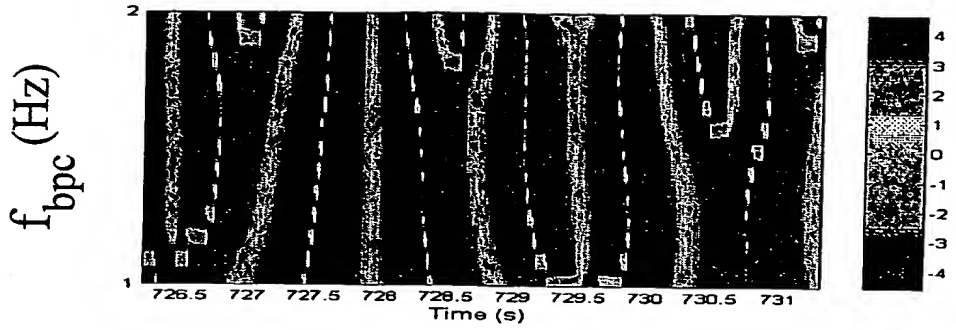

Figure 13 (e)

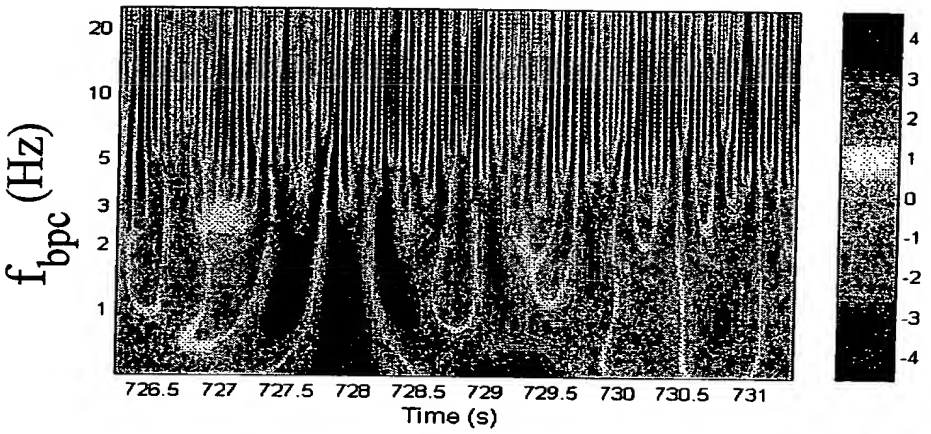

Figure 13 (f)

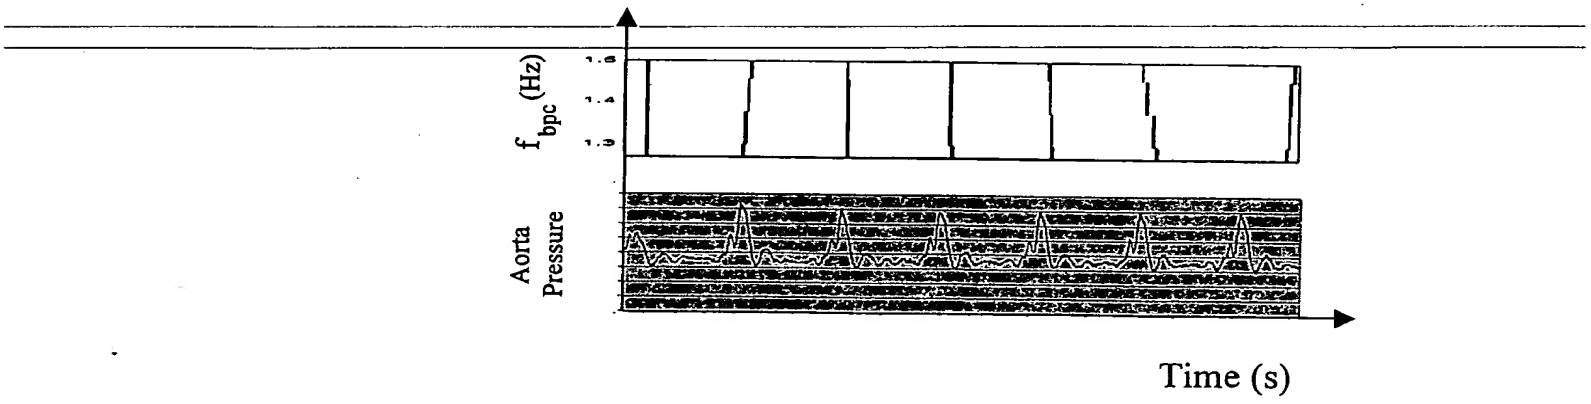

Figure 14 (a)

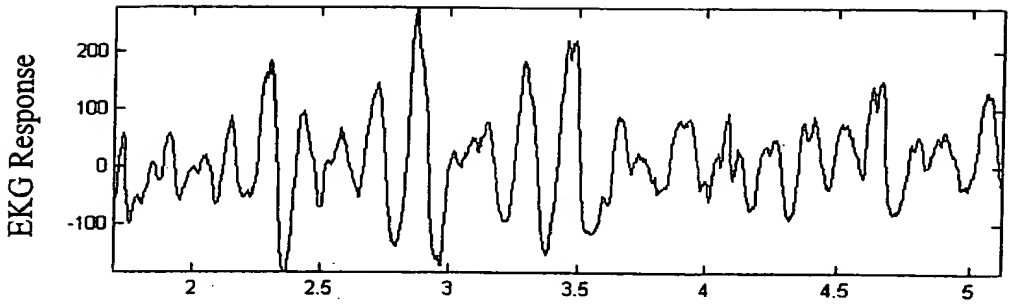

Figure 14 (b)

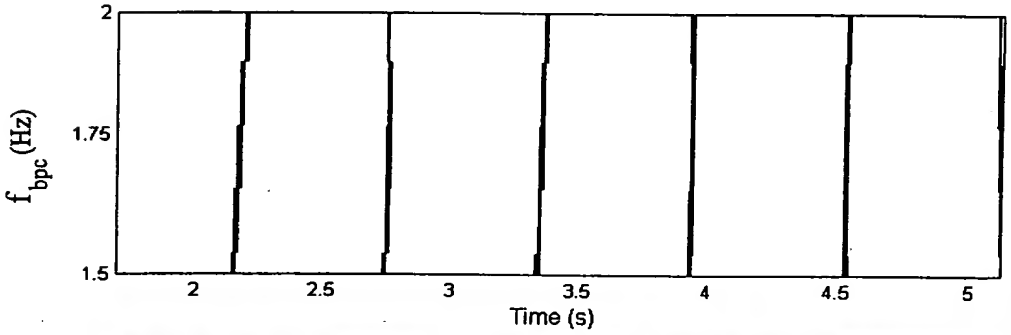

Figure 14 (c)

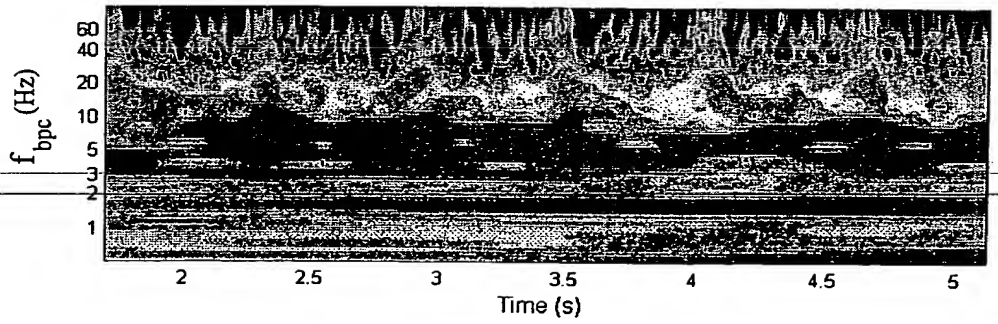

Figure 15 (a)

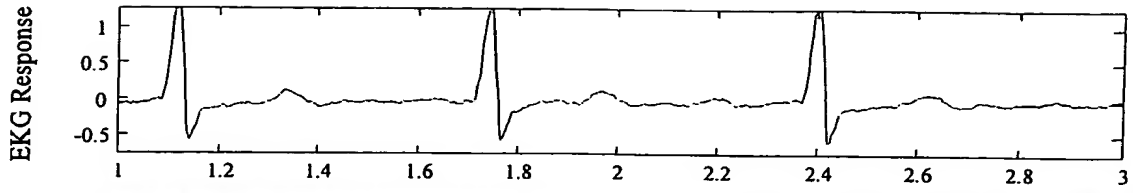

Figure 15 (b)

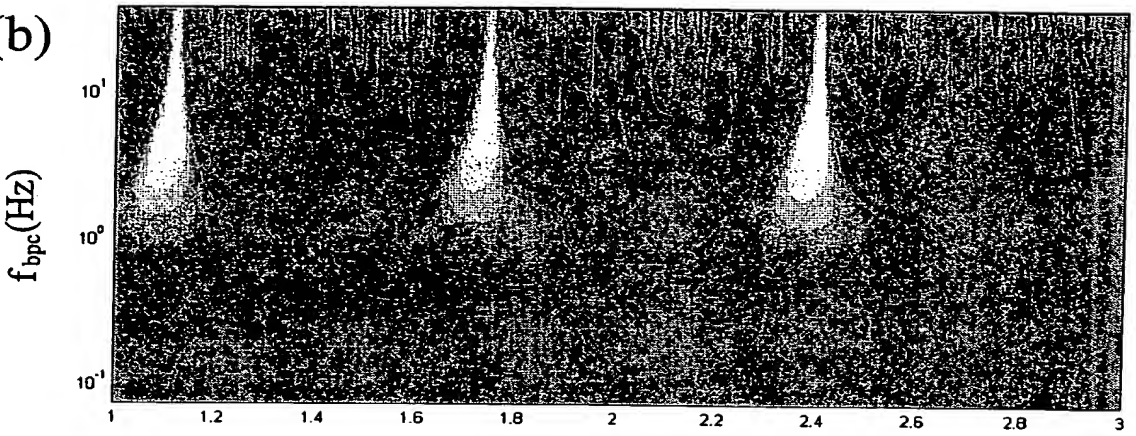

Figure 15 (c)

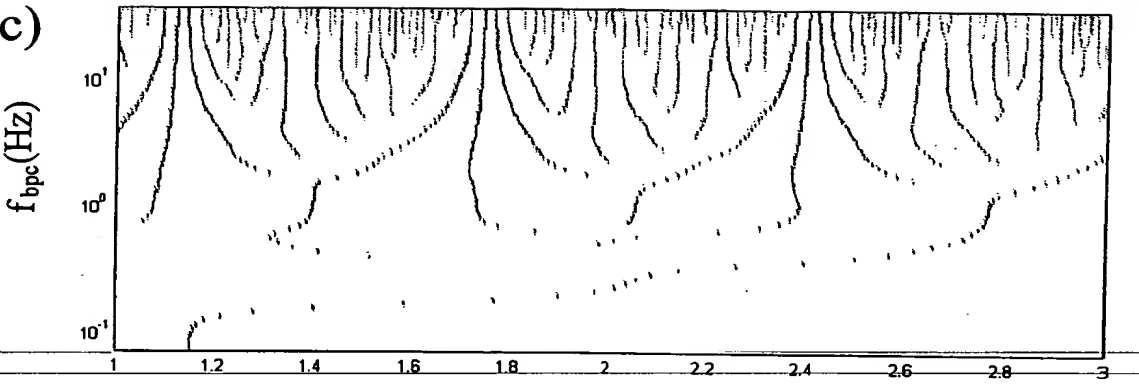

Figure 15 (d)

Figure 15 (e)

Figure 15 (f)

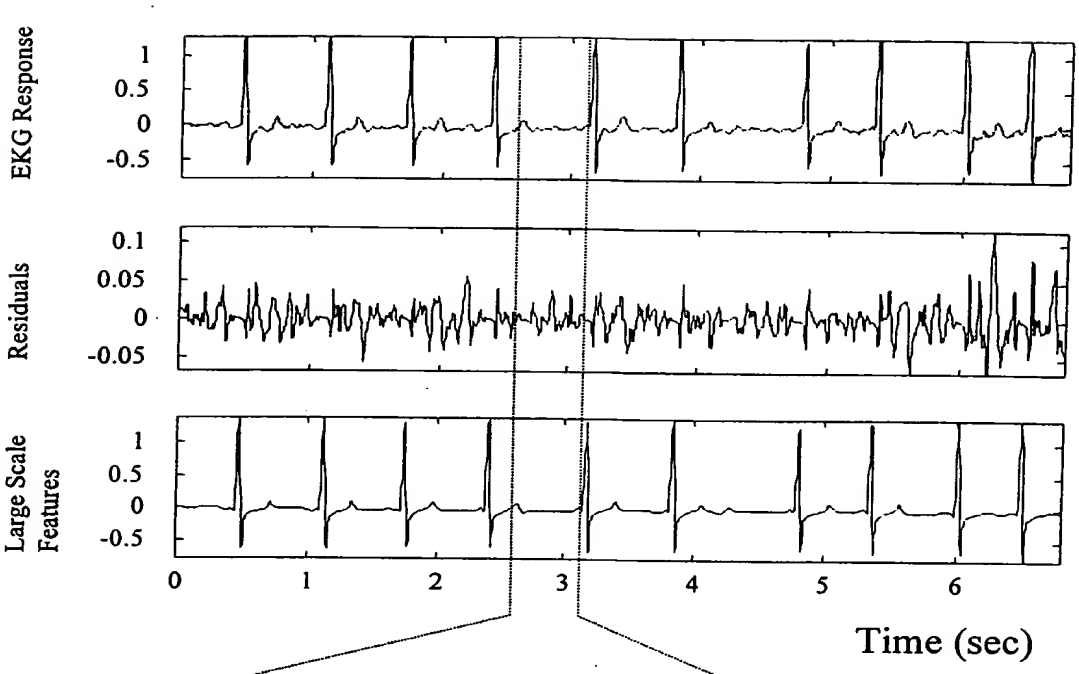

Figure 15 (g)

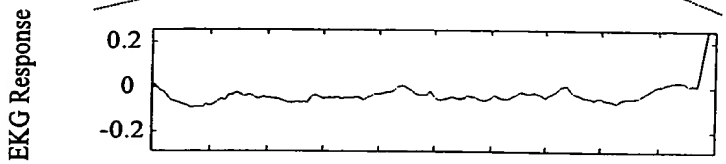

Original signal

Figure 15 (h)



QRS and T Filtered

Figure 15 (i)

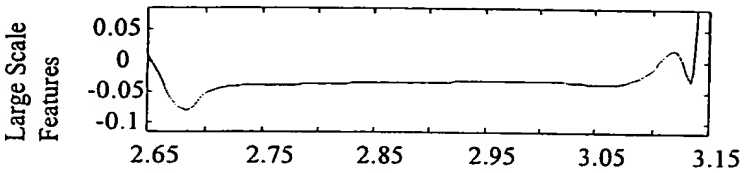

QRS and T signal

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
P23847A/JMK		
International application No.	International filing date *(day/month/year)*	(Earliest) Priority Date *(day/month/year)*
PCT/GB 00/01675	02/05/2000	01/05/1999
Applicant		
THE COURT OF NAPIER UNIVERSITY.		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 6 sheets.

[X] It is also accompanied by a copy of each prior art document cited in this report.

1. **Basis of the report**

   a. With regard to the **language,** the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

   [ ] the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

   b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

   [ ] contained in the international application in written form.

   [ ] filed together with the international application in computer readable form.

   [ ] furnished subsequently to this Authority in written form.

   [ ] furnished subsequently to this Authority in computer readble form.

   [ ] the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

   [ ] the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. [X] **Certain claims were found unsearchable** (See Box I).

3. [X] **Unity of invention is lacking** (see Box II).

4. With regard to the **title,**

   [X] the text is approved as submitted by the applicant.

   [ ] the text has been established by this Authority to read as follows:

5. With regard to the **abstract,**

   [X] the text is approved as submitted by the applicant.

   [ ] the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No. 9

   [X] as suggested by the applicant.

   [ ] because the applicant failed to suggest a figure.

   [ ] because this figure better characterizes the invention.

   [ ] None of the figures.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/GB 00/01675

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☒ Claims Nos.: 39 40
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
see FURTHER INFORMATION sheet PCT/ISA/210

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
1-16, 33-38

Remark on Protest

☐ The additional search fees were accompanied by the applicant's protest.

☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-16, 33, 34-38

   Method and device for ECG analysis using wavelet transformation or matching pursuit algorithms and visually displaying the signal and/or the decomposed waveform.

2. Claims: 17-21

   Analysis of an ECG of a heart in ventricular fibrillation after commencement of CPR and method of disassociating the CPR signal from the heart signal.

3. Claims: 22-32

   Method of estimating the health of a heart in ventricular fibrillation in order to guide therapeutic intervention or to predict outcome.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box I.2

Claims Nos.: 39 40

Rule 6.2 (a)
References to Other Parts of the International Application
Claims shall not, except where absolutely necessary, rely, in respect of the technical features of the
invention, on references to the description or drawings. In particular, they shall not rely on such
references as: "as described in part ... of the description," or "as illustrated in figure ... of the
drawings."

The applicant's attention is drawn to the fact that claims, or parts of claims, relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 00/01675

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G06F17/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G06F A61N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	WO 96 08992 A (SHOSHAN HERBERT Z ;UNIV RAMOT (IL); AKSELROD SOLANGE (IL); KESELBR) 28 March 1996 (1996-03-28) page 9, line 27 -page 11, line 9 page 13, line 29 -page 14, line 14	1,2,7-9, 12-15, 34-37 3-5,10, 11,16

X A	US 5 439 483 A (DUONG-VAN MINH) 8 August 1995 (1995-08-08) column 4, line 36-49	1,2,7, 16,22,34 3,23, 25-27,38

	-/--	

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
13 September 2000	22 12 2000

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Grossmann, C

Form PCT/ISA/210 (second sheet) (July 1992)

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DATABASE INSPEC [Online] INSTITUTE OF ELECTRICAL ENGINEERS, STEVENAGE, GB; 13 September 1998 (1998-09-13) MILLET-ROIG J; LOPEZ-SORIANO JJ; MOCHOLF A ET AL.: "Study of frequency and time domain parameters extracted by means of wavelet transform applied to ECG to distinguish between VF and other arrhythmias" XP002145546 abstract ---	1,2,16
X	CHEN J ET AL: "ECG DATA COMPRESSION BY USING WAVELET TRANSFORM" IEICE TRANSACTIONS ON INFORMATION AND SYSTEMS,JP,INSTITUTE OF ELECTRONICS INFORMATION AND COMM. ENG. TOKYO, vol. E76-D, no. 12, 1 December 1993 (1993-12-01), pages 1454-1461, XP000435570 ISSN: 0916-8532 abstract ---	1,2
X	DATABASE INSPEC [Online] INSTITUTE OF ELECTRICAL ENGINEERS, STEVENAGE, GB; 5 November 1996 (1996-11-05) GEVA A B: "Spatio-temporal matching pursuit (SToMP) for multiple source estimation of evoked potentials" XP002145547 abstract ---	33
X	SAVA H ET AL: "APPLICATION OF THE MATCHING PURSUIT METHOD FOR STRUCTURAL DECOMPOSITION AND AVERAGING OF PHONOCARDIOGRAPHIC SIGNALS" MEDICAL AND BIOLOGICAL ENGINEERING AND COMPUTING,GB,PETER PEREGRINUS LTD. STEVENAGE, vol. 36, no. 3, 1 May 1998 (1998-05-01), pages 302-308, XP000751653 ISSN: 0140-0118 the whole document ---	33
A	US 5 795 304 A (LEE KAE YOL ET AL) 18 August 1998 (1998-08-18) column 6, line 12 -column 7, line 23 -----	1,3

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/GB 00/01675

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9608992 A	28-03-1996	AU 3717495 A	09-04-1996
		EP 0869734 A	14-10-1998
		JP 11511036 T	28-09-1999
		US 5797840 A	25-08-1998
US 5439483 A	08-08-1995	NONE	
US 5795304 A	18-08-1998	NONE	